


BLUETOOTH CONDUCTIVITY ELECTRODE PART No. 0417-EB21

BLUETOOTH

- Suitable for water quality testing, aquaculture, food processing, etc.
- Standard android software that can read electrode parameters
- Automatic temperature compensation
- Multiple parameters can be measured simultaneously
- Test records can be exported
- Low voltage alarm
- Built-in Bluetooth with a 10m transmission range (under unobstructed and interference-free conditions)
- Automatic power off



software (included), only available on Android

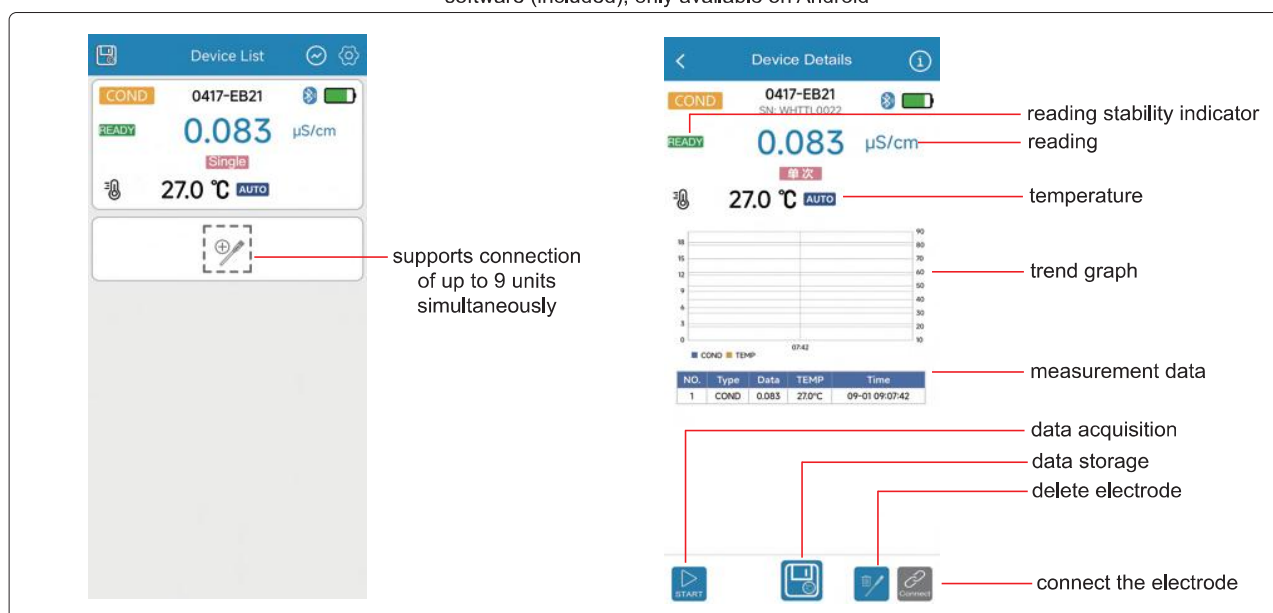

SPECIFICATION

Material		plastic
Suitable applications		conventional water, weak acids, weak alkalis
Conductivity	measuring range	1 $\mu\text{S}/\text{cm}$ ~2000 $\mu\text{S}/\text{cm}$
	resolution	0.01 $\mu\text{S}/\text{cm}$
	accuracy	$\pm 1\%$ FS
	calibration mode	single point
Temperature	measuring range	32~212 $^{\circ}\text{F}$
	resolution	.2 $^{\circ}\text{F}$
	accuracy	$\pm 9^{\circ}\text{F}$
	compensation range	32~212 $^{\circ}\text{F}$
Calibration point		1413 $\mu\text{S}/\text{cm}$
Data storage		manual, automatic
Power supply		rechargeable button battery (LIR2032 battery $\times 1$)
Dimension (L \times W \times H)		8.27 \times 0.98 \times 0.98"
Weight		0.13lb

STANDARD DELIVERY

Main unit	1 pc
Standard solution	3 bottles
LIR2032 battery	2 pcs
USB cable	1 pc
Charger	1 pc