


## PUMP GAS DETECTOR PART NO. 0616-MG04

CAN BE  
CUSTOMIZED

- Customize more than 30 types of gases, such as NO, NH<sub>3</sub>, Cl<sub>2</sub>, etc.
- Built-in pump measurement, fast response, high accuracy
- With metal crocodile clip, sturdy and drop resistant, easy to carry
- Customizable alarm values and calibration values
- Included extended gas tube for narrow gaps, equipment interiors, etc.
- Alarm mode: light emitting diode, sound, vibration, faults and undervoltage
- Screen brightness can be adjusted manually
- Self-test on startup
- Explosion proof level: Ex ib IIB T3 Gb



measurement interface

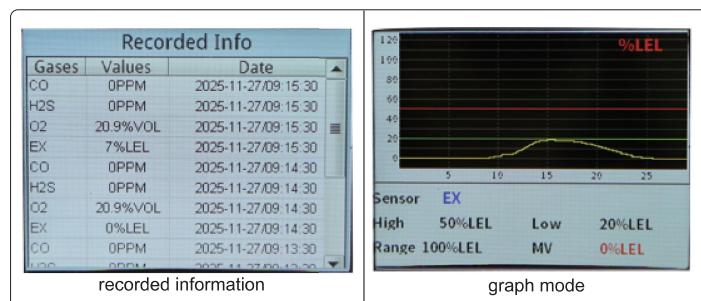

### SPECIFICATION

Gas	combustible gas/EX	O <sub>2</sub>	CO	H <sub>2</sub> S
Range	0~100%LEL	0~30.0%VOL	0~1000ppm	0~100ppm
Resolution	1%LEL	0.1%VOL	1ppm	1ppm
Accuracy	±5%FS	±2%FS	±5ppm or ±10%	±2ppm or ±10%
Response time	≤30s	≤20s	≤60s	≤60s
Sensor lifetime**	2 years			
Operation environment	-4°F~122°F, <95%RH, no condensation			
Storage environment	14°F~122°F, <95%RH, no condensation			
Power supply	3.7V rechargeable Li-ion battery, working time≥8h			
Dimension (L×W×H)	6.89×3.19×2.48" (includes back clip)			
Net weight	0.86lb			

\* Customize up to 4 gases simultaneously

\*\* Sensor lifetime depends on operation environment

### STANDARD DELIVERY

Main unit	1pc
118" connecting gas tube	1pc
Power adapter	1pc