



DATA OUTPUT

DIGITAL CALIPER WITH INTERCHANGEABLE POINTS PART NO. 1124-300A



1124-300A


short spherical/flat points (included)




long spherical/flat points (included)




short spherical blade points (included)





long spherical blade points (included)



- Supplied with 4 pairs of points and zero setting block for external measurement
- Resolution .0005"/0.01mm
- Buttons: on/off, set, inch/mm, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Made of stainless steel
- Optional accessory: points (part no. **1526-T101**, **7392**, **7391**, **7381**, **7321**), depth stop (part no. **6143**)

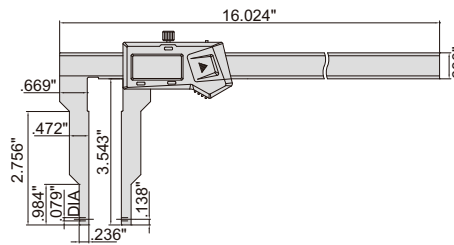

measure internal and external grooves

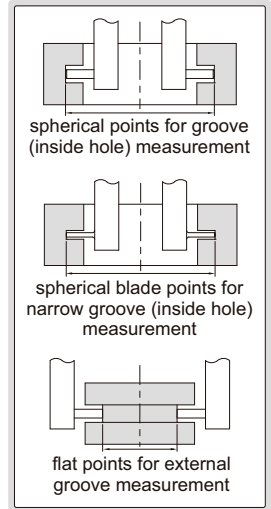

zero setting block for external measurement (included)



With data interface

Part No.	Data output cable (optional)
1124-300A	part no. 7315-21, 7302-21

Built-in wireless

Part No.	Receiver (optional)
1124-300AWL	part no. 7315-2/3/6/7/8



Point	Range	Accuracy	Application
short spherical/flat points	1-12.7"/24-324mm (internal) 0-11.3"/0-288mm (external)	±.0015"	spherical points for grooves inside hole (small hole) flat points for external grooves
long spherical/flat points	1.5-13.3"/40-340mm (internal) 0-10.7"/0-272mm (external)	±.0015"	spherical points for grooves inside hole (large hole) flat points for external grooves
short spherical blade points	1-12.7"/24-324mm (internal) 0-11.3"/0-288mm (external)	±.0015"	for narrow grooves inside hole (small hole)
long spherical blade points	1.5-13.3"/40-340mm(internal) 0-10.7"/0-272mm(external)	±.0015"	for narrow grooves inside hole (large hole)

Multifunctional points 7392* (optional, page)



Ball points 7391* (optional, page)



Screw thread points 7381*, 7321* (optional, page)



* It is necessary to use point sleeve (part no. **1526-T101**) for these points