

working with stands




working with
measuring jaws



1125-600

- Non waterproof
- Buttons: on/off, set, inch/mm, ABS, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Made of stainless steel



With data interface (data output cable
part no. 7315-22, 7302-22, optional)



Part No.	Range*	Resolution	Accuracy	L
1125-600	0-24"/0-600mm	.0005"/0.01mm	±.002"	30.6"
1125-1000	0-40"/0-1000mm	.0005"/0.01mm	±.003"	47.4"

Built-in wireless (receiver part no. 7315-2/3/6/7/8/9 is required)


Part No.	Range*	Resolution	Accuracy	L
1125-600WL	0-24"/0-600mm	.0005"/0.01mm	±.002"	30.6"
1125-1000WL	0-40"/0-1000mm	.0005"/0.01mm	±.003"	47.4"

*The range changes according to different points

Half disk points (included)




measuring external groove diameter with
flat measuring face (depth $h1 \leq .098"$)




measuring internal groove diameter with
spherical measuring face (depth $h2 \leq .295"$)

Conical points (optional)





Part No.
1125-T101-1





measuring center distance

Round shoulder points (optional)




Part No.
1125-T102

Flat shoulder points (optional)





Part No.
1125-T103

Spherical points (included)




Point sleeve (optional)

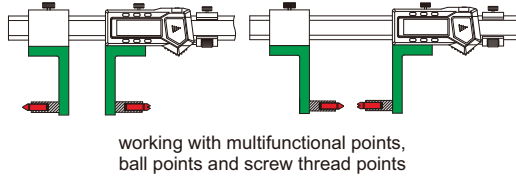



Part No.
1125-T104




Stands (included)

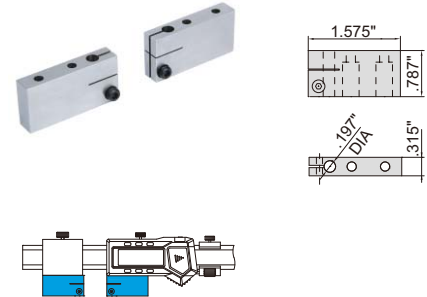

Depth stop (included)



Measuring jaws (included)



Multifunctional points 7392* (optional, page 30)



Ball points 7391* (optional, page 30)



Screw thread points 7381*, 7321* (optional, page 30)



* It is necessary to use point sleeve (part no. 1125-T104) for these points