


driving wheel
on the back

1151-300AE

- Non waterproof
- Resolution .0005"/0.01mm
- Buttons: on/off, zero, inch/mm, data hold, ABS/INC, preset
- ABS/INC is for absolute and incremental measurement
- Automatic power off, move the digital unit to turn on power
- Carbide tipped scriber
- Made of stainless steel (except the base)
- Battery CR2032, data output
- With driving wheel
- With dial test indicator holder
- Supplied with dust cover
- Optional accessory:
wireless transmitter part no. **7315-1151** (receiver is needed) page 8,
clamp for protractors (part no. **2372-CLAMP**)

Part No.	Range	Accuracy	L	a1	a2	b	c	D
1151-300AE	0-12"/0-300mm	±.0015"	18.701"	5.315"	1.693"	3.307"	1.299"	.591" DIA
1151-450AE	0-18"/0-450mm	±.0020"	25.984"	7.087"	2.126"	3.465"	1.496"	.787" DIA
1151-600AE	0-24"/0-600mm	±.0020"	31.890"	7.087"	2.126"	3.465"	1.496"	.787" DIA

clamp for protractors (optional)

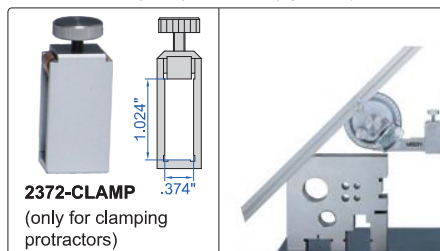

dial test indicator holder (included)

