




1311-6



1311-6B

- Shockproof dial indicator
- Made of stainless steel

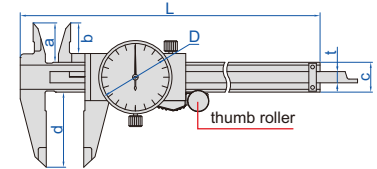

### Dial indicator graduation .001"

Part No.	Range	Accuracy	Thumb roller	Dial face color	L	a	b	c	d	D	t
1311-4*	0-4"	±.0012"	with	light green	6.496"	.709"	.472"	.512"	1.181"	1.260" DIA	.228"
1311-6*	0-6"	±.0015"	with	light green	9.252"	.827"	.650"	.630"	1.575"	1.535" DIA	.256"
1311-8*	0-8"	±.0020"	with	light green	11.339"	.945"	.748"	.630"	1.890"	1.535" DIA	.256"
1311-12*	0-12"	±.0020"	with	light green	16.142"	1.102"	.866"	.787"	2.441"	1.752" DIA	.295"
1311-6B*	0-6"	±.0015"	with	black	9.252"	.827"	.650"	.630"	1.575"	1.535" DIA	.256"

### Dial indicator graduation .001"/0.02mm

Part No.	Range	Accuracy	Thumb roller	Dial face color	L	a	b	c	d	D	t
1311-6D*	0-6"/0-150mm	±.0015"	with	light green	9.252"	.827"	.650"	.630"	1.575"	1.535" DIA	.256"
1311-8D*	0-8"/0-200mm	±.0020"	with	light green	11.339"	.945"	.748"	.630"	1.890"	1.535" DIA	.256"
1311-12D*	0-12"/0-300mm	±.0020"	with	light green	16.142"	1.102"	.866"	.787"	2.441"	1.752" DIA	.295"

### Dial indicator graduation: 0.01mm

Part No.	Range	Accuracy	Thumb roller	Dial face color	L	a	b	c	d	D	t
1311-150A*	0-150mm	±0.03mm	with	light green	235mm	21mm	16.5mm	16mm	40mm	Ø39mm	6.5mm
1311-200A*	0-200mm	±0.03mm	with	light green	288mm	24mm	19mm	16mm	48mm	Ø39mm	6.5mm
1311-300A*	0-300mm	±0.03mm	with	light green	410mm	28mm	22mm	20mm	62mm	Ø44.5mm	7.5mm

### Dial indicator graduation: 0.02mm

Part No.	Range	Accuracy	Thumb roller	Dial face color	L	a	b	c	d	D	t
1312-150A*	0-150mm	±0.03mm	with	light green	235mm	21mm	16.5mm	16mm	40mm	Ø39mm	6.5mm
1312-200A*	0-200mm	±0.03mm	with	light green	288mm	24mm	19mm	16mm	48mm	Ø39mm	6.5mm
1312-300A*	0-300mm	±0.03mm	with	light green	410mm	28mm	22mm	20mm	62mm	Ø44.5mm	7.5mm
1312-100AW*	0-100mm	±0.02mm	without	light green	165mm	18mm	13mm	13mm	30mm	Ø32mm	6mm

\* Supplied with manufacturer inspection certificate