

DIGITAL CALIPERS WITH INTERCHANGEABLE POINTS

DATA
OUTPUT


short spherical points (included)




long spherical/flat points (included)



spherical blade points (included)



1526-200

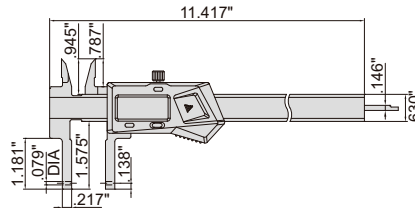


preset buttons



zero setting block for external measurement (included)



measure internal and external grooves

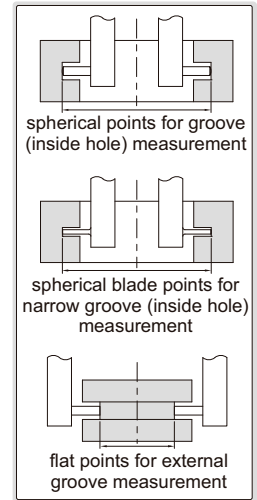

- Supplied with 3 pairs of points and zero setting block for external measurement
- Resolution .0005"/0.01mm
- Buttons: on/off, set, inch/mm, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032, data output
- Made of stainless steel
- Optional accessory: points

With data interface

Part No.	Data output cable (optional)
1526-200	part no. 7315-21, 7302-21

Built-in wireless



Part No.	Receiver (optional)
1526-200WL	part no. 7315-2, 7315-3

Point	Range	Accuracy	Application
short spherical points	.5-8.5"/12-212mm (internal)	±.0015"	for grooves inside small hole
long spherical/flat points	1-8.8"/24-224mm (internal) 0-7.5"/0-187mm (external)	±.0015"	spherical points for grooves inside hole flat points for external grooves
spherical blade points	1-8.8"/24-224mm (internal) 0-7.5"/0-187mm (external)	±.0015"	for narrow grooves inside hole

Depth stop (optional)



6143

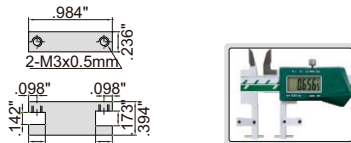


Part No.
6143

Point sleeve (optional)




1526-T101




Part No.
1526-T101

installation



Multifunctional points (optional)

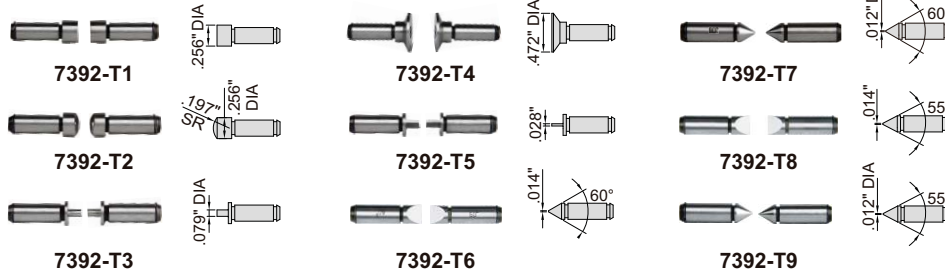

Range
2.6-10.5"/66-266mm (internal), 0-6.1"/0-155mm (external)

** Range of 1526-200 after installing the points and point sleeve

Part No.	Type
7392-T1*	flat
7392-T2*	spherical
7392-T3*	spline
7392-T4*	disk
7392-T5*	blade
7392-T6*	knife-edge
7392-T7*	point
7392-T8*	knife-edge
7392-T9*	point

* It is necessary to use point sleeve (part no. 1526-T101) for these points

Ball points (optional)



7391-T5

Part No.	Ball dia.(D)	Range **
7391-T3 *	.079" DIA	3.0-10.8"/75-275mm (internal) 0-5.7"/0-146mm (external)
7391-T4 *	.098" DIA	3.0-10.8"/76-276mm (internal) 0-5.7"/0-145mm (external)
7391-T5 *	.118" DIA	3.0-10.9"/77-277mm (internal) 0-5.6"/0-144mm (external)
7391-T6 *	.138" DIA	3.1-10.9"/78-278mm (internal) 0-5.6"/0-143mm (external)
7391-T7 *	.157" DIA	3.1-10.9"/79-279mm (internal) 0-5.6"/0-142mm (external)
7391-T8 *	.177" DIA	3.2-11.0"/80-280mm (internal) 0-5.5"/0-141mm (external)
7391-T9 *	.197" DIA	3.2-11.0"/81-281mm (internal) 0-5.5"/0-140mm (external)
7391-T10 *	.236" DIA	3.3-11.1"/83-283mm (internal) 0-5.4"/0-138mm (external)

* It is necessary to use point sleeve (part no. **1526-T101**) for these points

** Range of **1526-200** after installing the points and point sleeve

Screw thread points (optional)



7321-T16



7381-T11

Internal thread (60° thread angle)

Part No.	Pitch
7321-T11 *	64-48TPI/0.4-0.5mm
7321-T12 *	44-28TPI/0.6-0.9mm
7321-T13 *	24-14TPI/1-1.75mm
7321-T14 *	13-9TPI/2-3mm
7321-T15 *	8-5TPI/3.5-5mm
7321-T16 *	4.5-3.5TPI/5.5-7mm
7321-T1S *	6 pairs/set, including all above points

External thread (60° thread angle)

Part No.	Pitch
7381-T11 *	64-48TPI/0.4-0.5mm
7381-T12 *	44-28TPI/0.6-0.9mm
7381-T13 *	24-14TPI/1-1.75mm
7381-T14 *	13-9TPI/2-3mm
7381-T15 *	8-5TPI/3.5-5mm
7381-T16 *	4.5-3.5TPI/5.5-7mm
7381-TS *	6 pairs/set, including all above points

* It is necessary to use point sleeve (part no. **1526-T101**) for these points

Range **

2.6-10.5"/66-266mm (internal), 0-6.1"/0-155mm (external)

** Range of **1526-200** after installing the points and point sleeve