

# WATERPROOF DIGITAL INDICATORS


WATERPROOF

DATA  
OUTPUT


**INSPECTION  
CERTIFICATE**  
TRACEABLE TO NIST




2115-10E



2115-25E

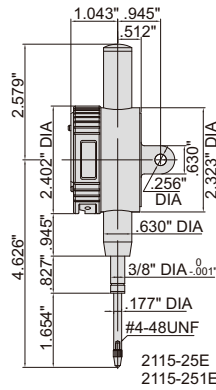

2115-50E

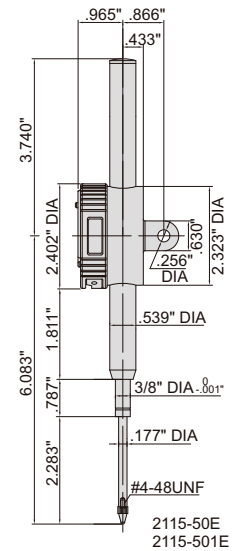

- Meet ASME B89.1.10M-2001
- Dust/waterproof
- Button function: on/off, zero, inch/mm, data preset, tolerance, change measuring direction, max./min./TIR measurement, absolute/incremental measurement
- Keep preset data and tolerance data in memory after restart
- CR2032 battery, automatic power off
- Data output
- With lug back
- Optional accessory: data output cable (part no. **7315-50M**, **7302-40M**, **7305-40M**), backs (page 74), contact points (page 73)

## Resolution .00005"/0.001mm

Part No.	Range	Dust/waterproof	Accuracy	Hysteresis
2115-101E*	.5"/12.7mm	IP65	±.00015"	.00005"
2115-251E*	1"/25.4mm	IP54	±.00015"	.00005"
2115-501E*	2"/50.8mm	IP54	±.00015"	.00005"


## Resolution .0005"/0.01mm

Part No.	Range	Dust/waterproof	Accuracy	Hysteresis
2115-10E*	.5"/12.7mm	IP65	±.0015"	.0005"
2115-25E*	1"/25.4mm	IP54	±.0015"	.0005"
2115-50E*	2"/50.8mm	IP54	±.0015"	.0005"

spindle lift knob is included (except 2115-10E/101E)



max./min./TIR



warning when over tolerance



\* Supplied with manufacturer inspection certificate traceable to NIST