


BACK PLUNGER TYPE DIGITAL INDICATORS

DATA
OUTPUT

**INSPECTION
CERTIFICATE**
TRACEABLE TO NIST



2118-10E

display can rotate 320°




analog pointer



warning when over tolerance



max./min./TIR




- Display can rotate 320°, display direction is changeable
- Reading in digit and analog
- Meet ASME B89.1.10-2001
- Button function: tolerance Go and No-Go display, data preset, measuring direction change, max./min./TIR measurement, inch/metric conversion, absolute/incremental measurement
- Keep preset data and tolerance data in memory after restart
- CR2032 battery, automatic power off (time is adjustable)
- Data output
- Optional accessory: data output cable (part no. 7315-50M, 7302-40M, 7305-40M), backs (page 74), contact points (page 73)

spindle lift knob is included



display direction is changeable

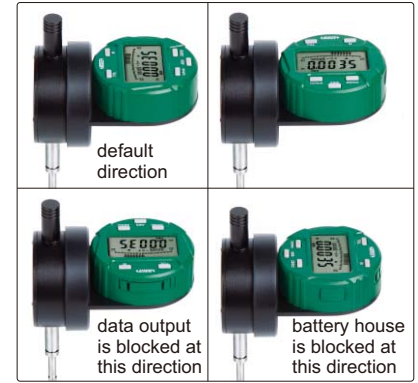

| Part No. | Range | Resolution | Accuracy | Hysteresis | Remark |
|------------|------------|-----------------|----------|------------|-----------|
| 2118-10E* | .5"/12.7mm | .0005"/0.01mm | ±.0015" | .0005" | flat back |
| 2118-101E* | .5"/12.7mm | .00005"/0.001mm | ±.00015" | .00005" | flat back |

* Supplied with manufacturer inspection certificate traceable to NIST

Remark: To change above direction, 4 fixing screws on the back of display need to be removed first.