



DIGITAL INTERNAL CALIPER GAGES

DATA
OUTPUT

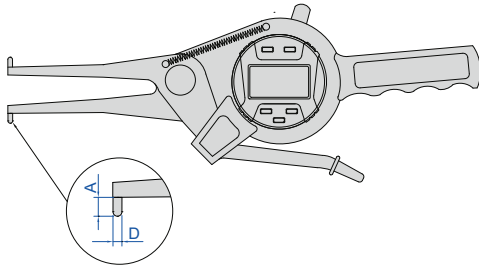

2151-35

- Carbide measuring tips
- Reading in digit and analog
- With transmission button and signal light
- Display can be rotated by 320°
- Button function: on/off, zero, tolerance Go and No-Go display, data preset, measuring direction change, max./min./TIR measurement, inch/metric conversion, absolute/incremental measurement
- 0-6 hours automatic power off time can be set
- CR2032 battery, automatic power off
- Data output
- Optional accessory: data output cable (part no. **7315-50M, 7302-50M, 7305-50M**)



Part No.	Range	Resolution	Accuracy	L	A	D
2151-35	.6-1.4"/15-35mm	.0005"/0.01mm	±.0016"	<1.969"	.118"	.118" DIA
2151-AL35	.6-1.4"/15-35mm	.0005"/0.01mm	±.0016"	<7.874"	.118"	.118" DIA
2151-55	1.4-2.2"/35-55mm	.0005"/0.01mm	±.0016"	<3.150"	.236"	.118" DIA
2151-AL55	1.4-2.2"/35-55mm	.0005"/0.01mm	±.0016"	<9.843"	.315"	.118" DIA
2151-75	2.2-3"/55-75mm	.0005"/0.01mm	±.0016"	<3.543"	.315"	.118" DIA
2151-AL75	2.2-3"/55-75mm	.0005"/0.01mm	±.0016"	<9.843"	.315"	.118" DIA
2151-95	3-3.8"/75-95mm	.0005"/0.01mm	±.0016"	<3.937"	.315"	.118" DIA
2151-115	3.8-4.6"/95-115mm	.0005"/0.01mm	±.0016"	<4.724"	.394"	.126" DIA
2151-135	4.6-5.4"/115-135mm	.0005"/0.01mm	±.0016"	<4.724"	.394"	.126" DIA