


DATA OUTPUT




2162-10

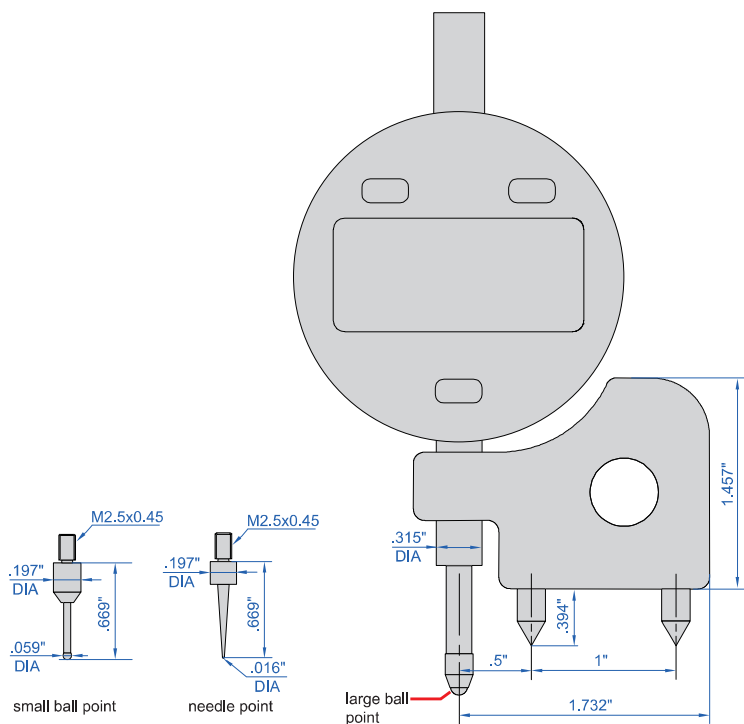

- Measure the weld reinforcement height and the pit depth of pipelines
- Button function: on/off, inch/mm, zero, data preset, change measuring direction, absolute/incremental measurement
- Keep preset data in memory after restart
- CR2032 battery, automatic power off (time is adjustable)
- Small ball point and needle point are included
- Data output
- Optional accessory:
wireless transmitter part no. **7315-50M** (receiver is needed)

application

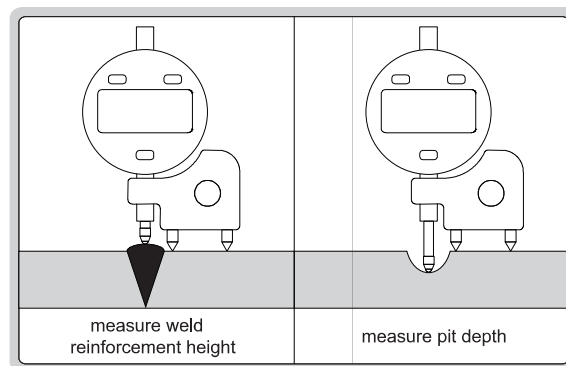

Part No.	Range(Adjustable)*	Range(Adjustable)**	Digital indicator stroke	Resolution	Accuracy
2162-10	0-.12"/0-3mm (raised) 0-.5"/0-12.7mm (sunked)	0-.5"/0-12.7mm (raised) 0-.5"/0-12.7mm (sunked)	.5"/12.7mm	.0005"/0.01mm	±.001"

*Measuring range with small ball probe or needle probe

**** Measuring range with large ball probe**