



# EXTERNAL THREAD CREST DIAMETER MEASURING INSTRUMENTS

MEET INTERNATIONAL  
STANDARD API5B



2236-5


application

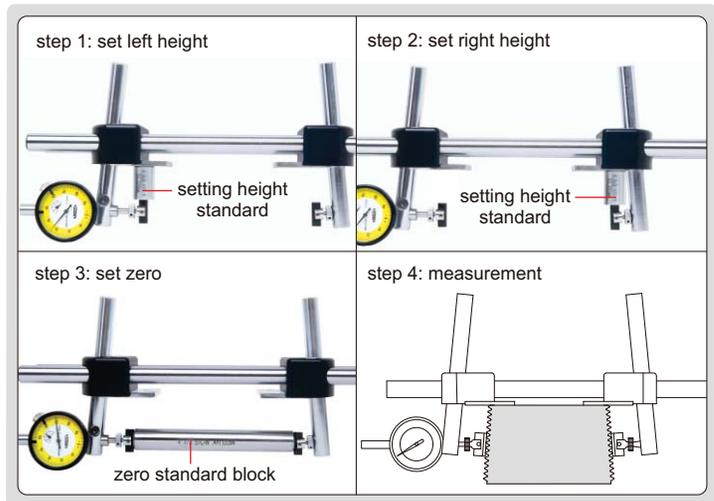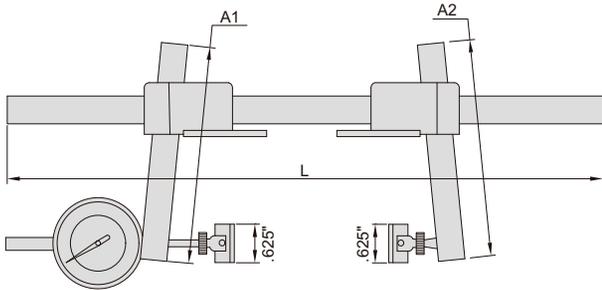

- Measure the crest diameter of external thread with nominal diameter larger than 2 3/8" (60.325mm) and less than 20" (508mm)
- Optional accessory: height standard and zero standard block

Part No.	Range	Dial indicator stroke	Dial indicator graduation	Accuracy	L	A1	A2
2236-5	2 3/8-5 1/2"/60.325-139.7mm	5mm	0.01mm	0.02mm	10.236"	4.331"	4.331"
2236-5E	2 3/8-5 1/2"/60.325-139.7mm	.25"	.0005"	.0008"	10.236"	4.331"	4.331"
2236-20	2 3/8-20"/60.325-508mm	.50"	.0005"	.002"	12", 18" or 24" *	6.299"	6.299"

\* Select suitable length of arm according to workpieces



## HEIGHT STANDARD AND ZERO STANDARD BLOCK (optional)

Part No.	Remark
2236-G □□□ *	including height standard and zero standard block A (without taper)
2236-K □□□ *	including height standard and zero standard block B (with taper)

\* Can be customized according to workpieces