


INTERNAL THREAD CREST DIAMETER MEASURING INSTRUMENTS


MEET INTERNATIONAL
STANDARD API5B



2237-5

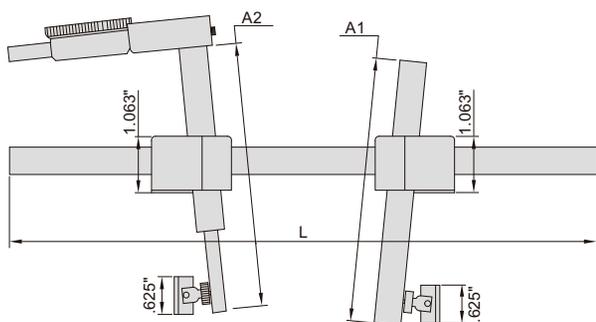


- Measure the crest diameter of internal thread with nominal diameter larger than 2 3/8" (60.325mm) and less than 20" (508mm)
- Optional accessory: height standard and zero standard block

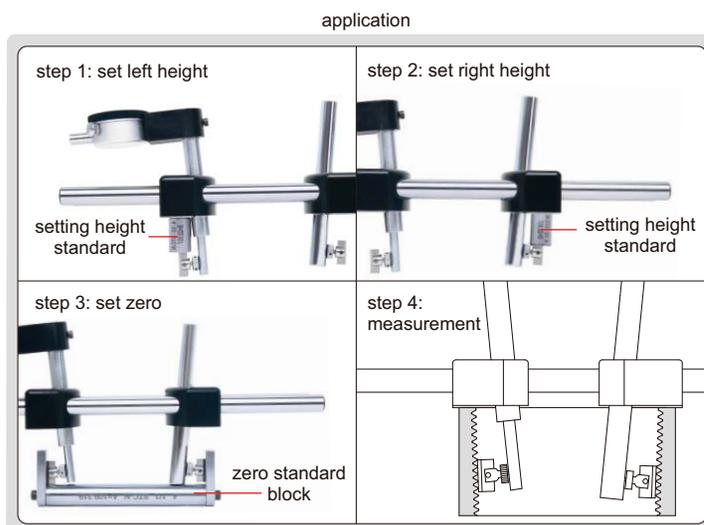

Part No.	Range	Dial indicator stroke	Dial indicator graduation	Accuracy	L	A1	A2
2237-5	2 3/8-5 1/2"/60.325-139.7mm	5mm	0.01mm	0.02mm	10.236"	4.409"	3.583"
2237-5E	2 3/8-5 1/2"/60.325-139.7mm	.25"	.0005"	.0008"	10.236"	4.409"	3.583"
2237-20	4 1/2-20"/114.3-508mm	.50"	.0005"	.002"	12", 18" or 24" *	6.969"	7.165"

* Select suitable length of arm according to workpieces



HEIGHT STANDARD AND ZERO STANDARD BLOCK (optional)

Part No.	Remark
2237-G □□□ *	including height standard and zero standard block A (without taper)
2237-K □□□ *	including height standard and zero standard block B (with taper)

* Can be customized according to workpieces