


ATTENTION: NOT SUITABLE FOR
.00005", .0001" OR 0.001MM DIAL INDICATORS

BUILT-IN WIRELESS DIGITAL
INDICATOR IS OPTIONAL

SHORT HANDLE BORE GAUGES (WITH DIAL INDICATOR)

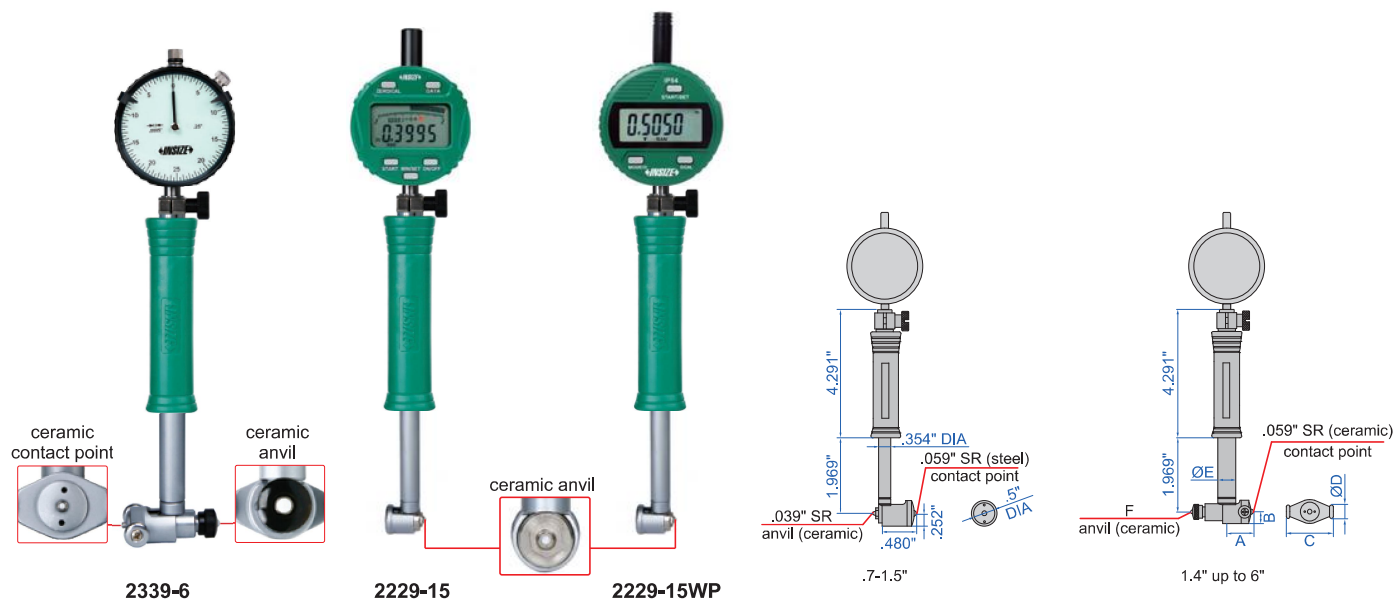


- The handle is shorter and lighter than that code 2323/2123, it is more convenient to operate in confined spaces or on workbenches
- Optional accessory: setting ring (code **6313**), bore gauge setter

Range	A	B	C	D (DIA)	E (DIA)	F
1.4-2.4"	.866"	.354"	1.063"	.512"	.504"	.079" R
2-6"	1.024"	.354"	1.378"	.512"	.504"	.079" R

With dial indicator

Part No.	Range	Indicator	Accuracy	Repeatability
2339-15	.7-1.5"	dial indicator, range .25", graduation .0005"	±.00075"	.00015"
2339-24	1.4-2.4"		±.0009"	.00015"
2339-6	2-6"		±.0009"	.00015"

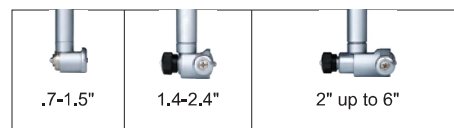

With digital indicator (optional wireless transmitter part no. 7315-51B, receiver is needed)


Part No.	Range	Indicator	Accuracy	Repeatability
2229-15	.7-1.5"	digital indicator, range .5"/12.7mm, part no. 2108-10EF , resolution .0001"/0.002mm (can switch to .0005"/0.01mm)	±.00075"	.0001"
2229-24	1.4-2.4"		±.0009"	.0001"
2229-6	2-6"		±.0009"	.0001"

with digital indicator

read the diameter directly,
after inputting the size
of setting ring.



the minimum value
tracking function can find
the diameter automatically.



With waterproof digital indicator (optional wireless transmitter part no. 7315-51B, receiver is needed)

Part No.	Range	Indicator	Accuracy	Repeatability
2229-15WP	.7-1.5"	waterproof digital indicator, part no. 2137-10EF , range .5"/12.7mm, dust/waterproof IP54, resolution .0001"/0.002mm (can switch to .0005"/0.01mm)	±.00075"	.0001"
2229-24WP	1.4-2.4"		±.0009"	.0001"
2229-6WP	2-6"		±.0009"	.0001"

with waterproof digital indicator

read the diameter directly,
after inputting the size of
setting ring.



the minimum value
tracking function can find
the diameter automatically.

