

BUILT-IN WIRELESS WATERPROOF DIGITAL INDICATORS




WATERPROOF

DATA
OUTPUT




2505-10EWL



2505-101EWL/2505-10EWL




2505-25EWL

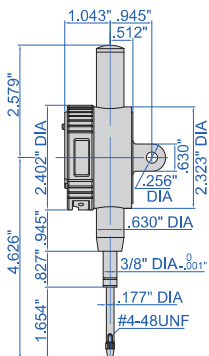

2505-251EWL/2505-25EWL




2505-50EWL

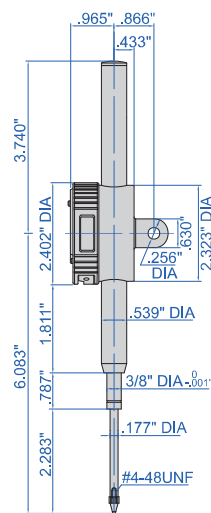

2505-501EWL/2505-50EWL

- Meet ASME B89.1.10M-2001
- Dust/waterproof
- Built-in wireless transmission
- Transmission distance is 33ft (under the condition of no obstruction and no electromagnetic interference)
- Button function: on/off, zero, tolerance Go and No-Go display, change measuring direction, max./min./TIR measurement, data preset, mm/inch, data output, absolute/incremental measurement
- Keep preset data and tolerance data in memory after restart
- Automatic power off (time is adjustable)
- Power: rechargeable Li-battery
- Optional accessory: receiver (part no. 7315-2/3/6/7/8/9), backs, contact points

max./min./TIR




alarm when over tolerance



spindle lift knob is included
(except 2505-101EWL/101EFWL,
2505-10EWL/10EFWL)



application

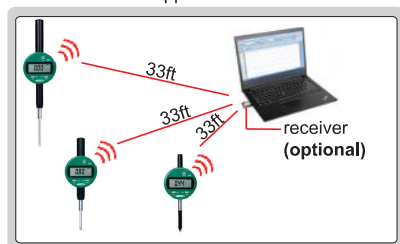

Resolution .00005"/0.001mm

Part no.	Range	Dust/waterproof	Accuracy	Hysteresis	Maximum measuring force	Cap	Remark
2505-101EWL *	.5"/12.7mm	IP65	±.00015"	.00005"	.337lbf	cannot lift	lug back
2505-251EWL *	1"/25.4mm	IP54	±.00015"	.00005"	.495lbf	cannot lift	lug back
2505-501EWL *	2"/50.8mm	IP54	±.00015"	.00005"	.562lbf	cannot lift	lug back
2505-101EFWL *	.5"/12.7mm	IP65	±.00015"	.00005"	.337lbf	cannot lift	flat back
2505-251EFWL *	1"/25.4mm	IP54	±.00015"	.00005"	.495lbf	cannot lift	flat back
2505-501EFWL *	2"/50.8mm	IP54	±.00015"	.00005"	.562lbf	cannot lift	flat back

Resolution .0005"/0.01mm

Part no.	Range	Dust/waterproof	Accuracy	Hysteresis	Maximum measuring force	Cap	Remark
2505-10EWL *	.5"/12.7mm	IP65	±.0015"	.0005"	.337lbf	cannot lift	lug back
2505-25EWL *	1"/25.4mm	IP54	±.0015"	.0005"	.495lbf	cannot lift	lug back
2505-50EWL *	2"/50.8mm	IP54	±.0015"	.0005"	.562lbf	cannot lift	lug back
2505-10EFWL *	.5"/12.7mm	IP65	±.0015"	.0005"	.337lbf	cannot lift	flat back
2505-25EFWL *	1"/25.4mm	IP54	±.0015"	.0005"	.495lbf	cannot lift	flat back
2505-50EFWL *	2"/50.8mm	IP54	±.0015"	.0005"	.562lbf	cannot lift	flat back

* Supplied with manufacturer inspection certificate