


CAN BE CUSTOMIZED



DATA
OUTPUT

DIGITAL COMPARISON GAUGES

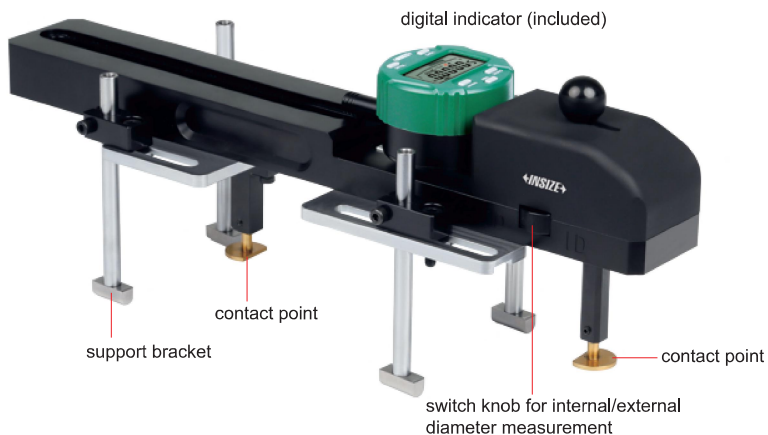


2514-300

- Measure internal diameter and external diameter
- Measuring force .67-.9lbf, point height is adjustable(h) .394-1.575"
- Digital indicator display can be rotated by 320°
- Digital indicator button function: on/off, zero setting, tolerance Go and No-Go display, measuring direction change, max./min./TIR measurement, data preset, inch/metric conversion, data output, absolute/incremental measurement
- Digital indicator can keep preset data and tolerance data in memory after restart
- Digital indicator power:
with data interface: CR2032
built-in wireless: rechargeable lithium battery
- Optional accessory: gauge blocks (part no. 4101)
gauge block accessory (part no. 6881)

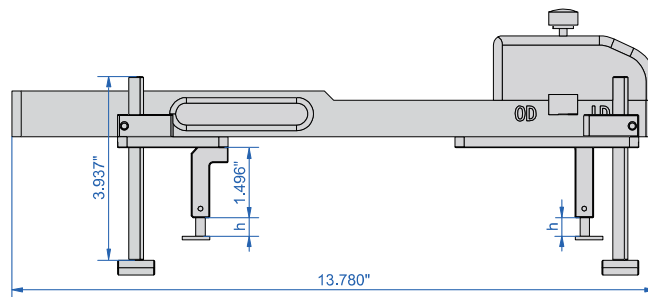

Contact points (included, supplied in pair)

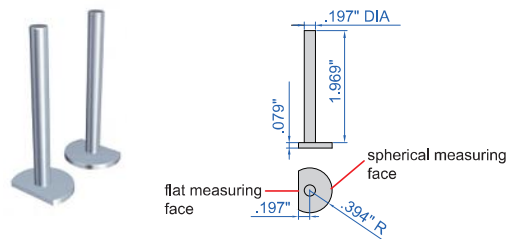

With data interface (data output cable part no. 7315-50M need receiver, optional)

| Part No. | Range of internal/external diameter | Contact point stroke | Accuracy | Repeatability | Indicator |
|----------|-------------------------------------|----------------------|----------|---------------|---|
| 2514-300 | 100-300mm(3.937-11.811") | .394" | .00020" | .00010" | Digital indicator, range .5"/12.7mm, resolution .00005"/0.001mm |

Built-in wireless (receiver part no. 7315-2/3/6/7/8/9 is required, optional)

| Part No. | Range of internal/external diameter | Contact point stroke | Accuracy | Repeatability | Indicator |
|------------|-------------------------------------|----------------------|----------|---------------|---|
| 2514-300WL | 100-300mm(3.937-11.811") | .394" | .00020" | .00010" | Digital indicator, range .5"/12.7mm, resolution .00005"/0.001mm |