



BORE GAGES

ATTENTION: NOT SUITABLE FOR
.00005", .0001" OR 0.001MM DIAL INDICATORS

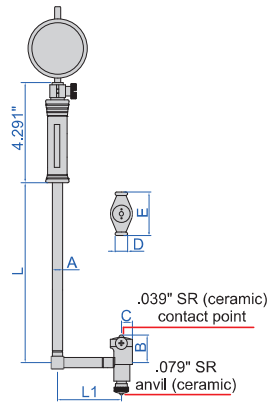

2827-6



- Optional accessory: setting ring (part no. 6313), long handle (part no. 7351), bore gage setter (part no. 2395-400)

Range	A (DIA)	B	C	D (DIA)	E	L	L1
1.4-2.4"	.504"	.886"	.354"	.512"	1.063"	5.551"	2.953"
2-6"	.504"	1.122"	.362"	.512"	1.378"	5.551"	3.000"
6-10"	.571"	2.441"	.500"	.591"	2.933"	15.394"	3.937"
10-16"	.571"	3.602"	.591"	.591"	3.996"	15.394"	3.937"

With dial indicator


Part No.	Range	Indicator	Accuracy	Repeatability
2827-24	1.4-2.4"	dial indicator, range .25", graduation .0005"	±.0009"	.00015"
2827-6	2-6"		±.0009"	.00015"
2827-10	6-10"		±.0009"	.00015"
2827-16	10-16"		±.0009"	.00015"

With digital indicator

(data output cable part no. 7315-50M page 5, 7302-40M page 13, optional)

Part No.	Range	Indicator	Accuracy	Repeatability
2127-24	1.4-2.4"	digital indicator, part no. 2108-10EF, range .5"/12.7mm resolution .0001"/0.002mm (can switch to .0005"/0.01mm)	±.0009"	.00015"
2127-6	2-6"		±.0009"	.00015"
2127-10	6-10"		±.0009"	.00015"
2127-16	10-16"		±.0009"	.00015"

with digital indicator

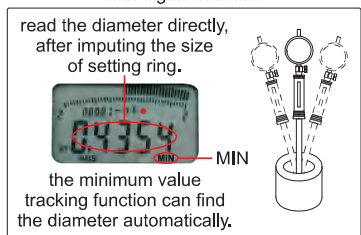

With waterproof digital indicator

(data output cable part no. 7315-50M page 5, 7302-40M page 13, optional)

Part No.	Range	Indicator	Accuracy	Repeatability
2127-24WP	1.4-2.4"	waterproof digital indicator, part no. 2137-10EF, range .5"/12.7mm, dust/waterproof IP54, resolution .0001"/0.002mm (can switch to .0005"/0.01mm)	±.0009"	.00015"
2127-6WP	2-6"		±.0009"	.00015"
2127-10WP	6-10"		±.0009"	.00015"
2127-16WP	10-16"		±.0009"	.00015"

with waterproof digital indicator

