



BORE GAGES

ATTENTION: NOT SUITABLE FOR
.00005", .0001" OR 0.001MM DIAL INDICATORS

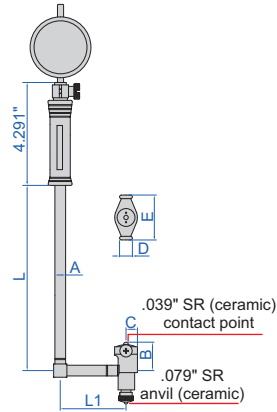

2827-6



- Optional accessory: setting ring (part no. 6313), long handle (part no. 7351), bore gage setter (part no. 2395-400)

Range	A (DIA)	B	C	D (DIA)	E	L	L1
1.4-2.4"	.504"	.886"	.354"	.512"	1.063"	5.551"	2.953"
2-6"	.504"	1.122"	.362"	.512"	1.378"	5.551"	3.000"
6-10"	.571"	2.441"	.500"	.591"	2.933"	15.394"	3.937"
10-16"	.571"	3.602"	.591"	.591"	3.996"	15.394"	3.937"

With dial indicator

Part No.	Range	Indicator	Accuracy	Repeatability
2827-24	1.4-2.4"	dial indicator, range .25", graduation .0005"	±.0009"	.00015"
2827-6	2-6"		±.0009"	.00015"
2827-10	6-10"		±.0009"	.00015"
2827-16	10-16"		±.0009"	.00015"

With digital indicator

(data output cable part no. 7315-50M page 5, 7302-40M page 13, optional)

Part No.	Range	Indicator	Accuracy	Repeatability
2127-24	1.4-2.4"	digital indicator, part no. 2137-10EF, range .5"/12.7mm resolution .0001"/0.002mm (can switch to .0005"/0.01mm)	±.0009"	.00015"
2127-6	2-6"		±.0009"	.00015"
2127-10	6-10"		±.0009"	.00015"
2127-16	10-16"		±.0009"	.00015"

with digital indicator

read the diameter directly, after inputting the size of setting ring.

the minimum value tracking function can find the diameter automatically.

With waterproof digital indicator

(data output cable part no. 7315-50M page 5, 7302-40M page 13, optional)

Part No.	Range	Indicator	Accuracy	Repeatability
2127-24WP	1.4-2.4"	waterproof digital indicator, part no. 2137-10EF, range .5"/12.7mm, dust/waterproof IP54, resolution .0001"/0.002mm (can switch to .0005"/0.01mm)	±.0009"	.00015"
2127-6WP	2-6"		±.0009"	.00015"
2127-10WP	6-10"		±.0009"	.00015"
2127-16WP	10-16"		±.0009"	.00015"

with waterproof digital indicator

read the diameter directly, after inputting the size of setting ring.

the minimum value tracking function can find the diameter automatically.