

SMART DIGITAL THICKNESS GAUGES

ATTENTION: RECHARGEABLE BATTERY,
FOR 24 HOURS CONTINUOUS WORKING

DATA
OUTPUT

LINEAR BALL BEARINGS
FOR TEN MILLION TIMES USE

ABSOLUTE ENCODER, THE ORIGINAL
DATA REMAINS AFTER POWER OFF

AUTOMATIC MEASUREMENT OF THE MIN. VALUE, AND THE DATA
CAN BE TRANSMITTED AUTOMATICALLY AFTER MEASUREMENT




2850-10


- Linear ball bearings for ten million times use
- Absolute encoder, the original data remains after power off
- Adjustable resolution: .00002"/0.0005mm
.00005"/0.001mm
.0005"/0.01mm
- Ceramic spindle tip and anvil
- Reading in digital and analog
- Data output
- Automatic measurement of the min. value, and the data can be transmitted automatically after measurement
- Button function: data output, tolerance, data preset, data hold, measuring direction change, power off time, on/off, mm/inch, adjust resolution
- Power: rechargeable battery, for 24 hours continuous working

With data interface

Optional accessory:
wireless transmitter, code **7315-60** page
data output cable (keyboard format), code **7302-60** page

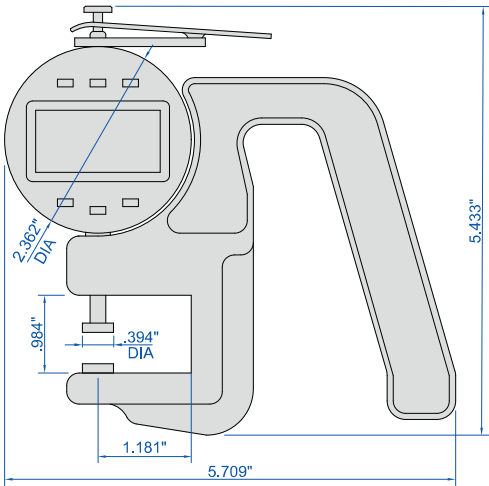

alarm when
over tolerance



analog pointer

analog pointer



wireless receiver

2134-R1, 2134-R2 (optional)



Part No.	Range	Accuracy
2850-10	.4"/10mm	±.00012"

Built-in wireless

Optional accessory:
wireless receiver (keyboard format, connect up to 15 digital indicators), code **2134-R1**
wireless receiver (serial port format, connect up to 15 digital indicators), code **2134-R2**

Part No.	Range	Accuracy
2850-10WL	.4"/10mm	±.00012"