

# DIGITAL RUBBER THICKNESS GAUGES



DATA  
OUTPUT



2878-6B



2878-71B

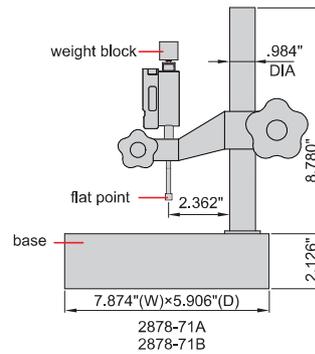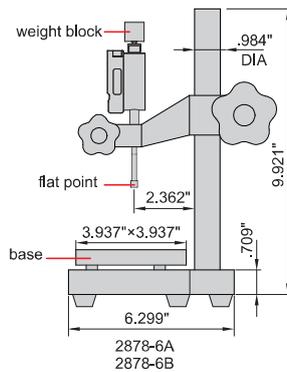

- Measure thickness of vulcanized rubber and plastic products
- Button function: on/off, inch/mm, zero, data preset, change measuring direction, absolute/incremental measurement
- CR2032 battery, automatic power off (time is adjustable)
- Supplied with dust cover
- Optional accessory:
  - wireless transmitter part no. **7315-51** (receiver is needed) page 6,
  - flat points, weight blocks

Part No.	Range	Resolution	Accuracy	Flat point diameter	Pressure	Base
2878-6A	.4"/10mm	.0005"/0.01mm	.001"	.236"	22kPa±5kPa	ceramic, plain, flatness 59µin
2878-6B	.4"/10mm	.00005"/0.001mm	.0002"	.236"	22kPa±5kPa	ceramic, plain, flatness 59µin
2878-71A	.4"/10mm	.0005"/0.01mm	.001"	.236"	22kPa±5kPa	granite, plain, flatness 98µin
2878-71B	.4"/10mm	.00005"/0.001mm	.0002"	.236"	22kPa±5kPa	granite, plain, flatness 98µin

### Flat points and weight blocks (optional)

Flat point	Flat point part no.	Pressure				
		10KPa±2KPa	22KPa±5KPa	20KPa±3KPa	70KPa±5KPa	1.6KPa±0.1KPa
		weight block part no.				
.157" DIA	2878-P4	—	2878-W4B	—	—	—
.197" DIA	2878-P5	2878-W5A	2878-W5B	2878-W5C	2878-W5D	—
.236" DIA	2878-P6	2878-W6A	2878-W6B	—	—	—
.315" DIA	2878-P8	2878-W8A	2878-W8B	—	—	—
.394" DIA	2878-P10	2878-W10A	2878-W10B	2878-W10C	—	—
.984" DIA	2878-P25	—	—	—	—	2878-W25E
.039"×.157" (rectangle)	2878-P14	—	—	—	2878-W14D	—