

DIGITAL OUTSIDE MICROMETERS (BASIC TYPE, WITH DATA OUTPUT)


DATA
OUTPUT

**INSPECTION
CERTIFICATE**



3102-25E

- Resolution .00005"/0.001mm
- Button function: on/off, set, inch/mm, data transmit
- Automatic power off
- Carbide measuring faces
- Friction thimble
- Supplied with spherical anvil
- Setting standards are included (except 0-1"/0-25mm)
- Optional accessory:
wireless transmitter part no. **7315-30** (receiver is needed) page 5

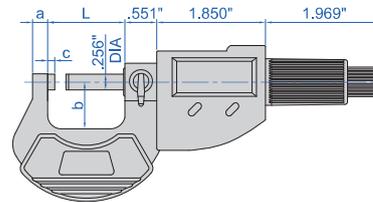

Individual

Part No.	Range	Accuracy	L	a	b	c
3102-25E*	0-1"/0-25mm	±.00010"	1.260"	.236"	.945"	.118"
3102-50E*	1-2"/25-50mm	±.00010"	2.244"	.315"	1.260"	.118"
3102-75E*	2-3"/50-75mm	±.00015"	3.228"	.315"	1.772"	.118"
3102-100E*	3-4"/75-100mm	±.00015"	4.213"	.394"	2.244"	.118"
3102-125E	4-5"/100-125mm	±.00015"	5.236"	.394"	2.756"	.118"
3102-150E	5-6"/125-150mm	±.00015"	6.220"	.394"	3.228"	.118"
3102-175E	6-7"/150-175mm	±.00020"	7.205"	.472"	3.740"	.217"
3102-200E	7-8"/175-200mm	±.00020"	8.228"	.472"	4.213"	.217"



3102-33E



3102-66E



Set

Part No.	Range	Micrometers included	Packaging
3102-33E*	0-3"/0-75mm	3102-25E, 3102-50E, 3102-75E	blow mould case
3102-44E*	0-4"/0-100mm	3102-25E, 3102-50E, 3102-75E, 3102-100E	blow mould case
3102-66E	0-6"/0-150mm	3102-25E, 3102-50E, 3102-75E, 3102-100E, 3102-125E, 3102-150E	portable protective case

* Supplied with manufacturer inspection certificate