




DATA
OUTPUT

IP65
WATERPROOF


INSPECTION
CERTIFICATE

QUICK FEEDING DIGITAL OUTSIDE MICROMETERS


QUICK MEASUREMENT
2MM FEEDING OF EACH TURN

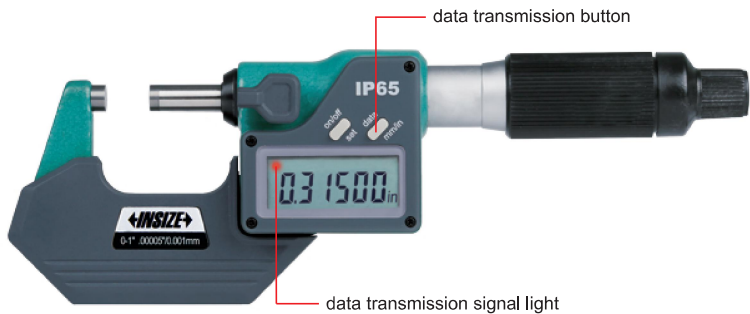

3105-25E

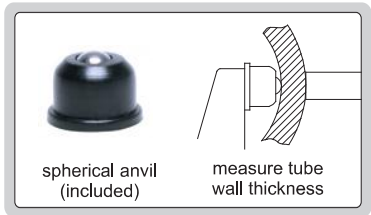

- 2mm feeding of each turn
- IP65 dust/waterproof
- Button function: on/off, set, inch/mm, data transmission
- Automatic power off
- Carbide measuring faces, friction thimble
- Supplied with spherical anvil
- Supplied with setting standards (except 0-1"/0-25mm)
- Power:
with data interface: CR2032
built-in wireless: rechargeable lithium battery

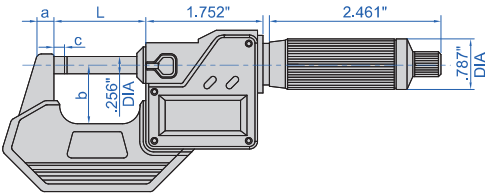

With data interface (optional wireless transmitter part no. 7315-31, receiver is needed)

Part No.	Range	Resolution	Accuracy	L	a	b	c
3105-25E *	0-1"/0-25mm	.00005"/0.001mm	±.00010"	1.358"	.236"	.984"	.118"
3105-50E *	1-2"/25-50mm	.00005"/0.001mm	±.00010"	2.343"	.315"	1.260"	.118"
3105-75E *	2-3"/50-75mm	.00005"/0.001mm	±.00015"	3.327"	.315"	1.752"	.118"
3105-100E *	3-4"/75-100mm	.00005"/0.001mm	±.00015"	4.311"	.315"	2.244"	.118"
3105-125E	4-5"/100-125mm	.00005"/0.001mm	±.00015"	5.315"	.394"	2.756"	.118"
3105-150E	5-6"/125-150mm	.00005"/0.001mm	±.00015"	6.319"	.394"	3.228"	.118"
3105-175E	6-7"/150-175mm	.00005"/0.001mm	±.00020"	7.323"	.472"	3.720"	.217"
3105-200E	7-8"/175-200mm	.00005"/0.001mm	±.00020"	8.327"	.472"	4.213"	.217"
3105-225E	8-9"/200-225mm	.00005"/0.001mm	±.00020"	9.291"	.906"	5.098"	.217"
3105-250E	9-10"/225-250mm	.00005"/0.001mm	±.00020"	10.295"	.906"	5.610"	.217"
3105-275E	10-11"/250-275mm	.00005"/0.001mm	±.00020"	11.299"	.906"	6.102"	.217"
3105-300E	11-12"/275-300mm	.00005"/0.001mm	±.00020"	12.303"	.906"	6.594"	.217"

* Supplied with manufacturer inspection certificate

Built-in wireless (receiver
part no. 7315-2/3/6/7/8/9 is needed)

Part No.
3105-□□□□ WL

Part no. examples:

Original part no.	Wireless part no.
3105-25E	3105-25EWL
3105-50E	3105-50EWL