

IP65
WATERPROOF


DATA
OUTPUT

DIGITAL TWO POINTS/THREE POINTS INTERNAL MICROMETERS

INSPECTION
CERTIFICATE




3127-E02



type A
.08-.28", carbide
measuring points
two points




3127-E05

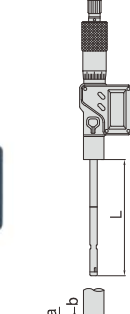

type B
.275-.5", steel
measuring points




3127-E16

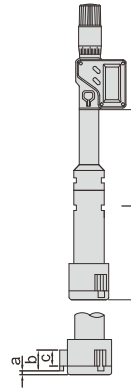

type C
.5-2", carbide
measuring points



3127-E5

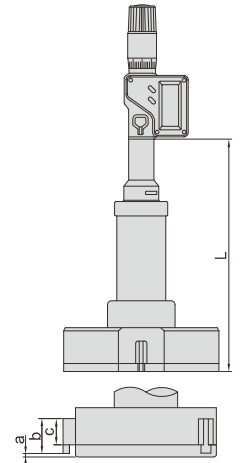

type D
2-12", carbide
measuring points

- Resolution .00005"/0.001mm (**3127-E11** and **3127-E12** is .0001"/0.001mm)
- IP65 dust/waterproof
- Buttons: on/off, set, inch/mm, data transmit
- Data output
- Automatic power off
- Ratchet stop
- Optional accessory: data output cable (part no. **7315-31** page 4, **7302-30** page 12), setting ring (part no. **6312**), micrometer stand and clamp (part no. **6301** and **6301-2**)

Individual

Part No.	Range	Type	Accuracy	Setting ring	Extension rod (included)	L	a	b	c
3127-E01*	.08-.1"/2-2.5mm	A (two points)	.00025"	.1" DIA (included)	—	.472"	—	—	—
3127-E012*	.1-.12"/2.5-3mm	A (two points)	.00025"	.1" DIA (included)	—	.472"	—	—	—
3127-E016*	.12-.16"/3-4mm	A (two points)	.00025"	.16" DIA (included)	—	.866"	—	—	—
3127-E02*	.16-.2"/4-5mm	A (two points)	.00025"	.16" DIA (included)	—	.866"	—	—	—
3127-E024*	.2-.24"/5-6mm	A (two points)	.00025"	.24" DIA (included)	—	.866"	—	—	—
3127-E028*	.24-.28"/6-7mm	A (two points)	.00025"	.24" DIA (included)	—	.866"	—	—	—
3127-E035*	.275-.35"/7-9mm	B (three points)	.00015"	.275" DIA (included)	4"	2.146"	.059"	.098"	—
3127-E0425*	.35-.425"/9-11mm	B (three points)	.00015"	.35" DIA (included)	4"	2.146"	.059"	.098"	—
3127-E05*	.425-.5"/11-13mm	B (three points)	.00015"	.5" DIA (included)	4"	2.146"	.059"	.098"	—
3127-E065*	.5-.65"/13-17mm	C (three points)	.00015"	.65" DIA (included)	6"	3.150"	.020"	.236"	.177"
3127-E08*	.65-.8"/17-20mm	C (three points)	.00015"	.65" DIA (included)	6"	3.150"	.020"	.236"	.177"
3127-E1*	.8-1"/20-25mm	C (three points)	.00015"	1" DIA (included)	6"	3.543"	.020"	.315"	.236"
3127-E112*	1-1.2"/25-30mm	C (three points)	.00015"	1" DIA (included)	6"	3.543"	.020"	.315"	.236"
3127-E16*	1.2-1.6"/30-40mm	C (three points)	.00015"	1.6" DIA (included)	6"	3.819"	.020"	.551"	.472"
3127-E2*	1.6-2"/40-51mm	C (three points)	.00020"	1.6" DIA (included)	6"	3.819"	.020"	.551"	.472"
3127-E25*	2-2.5"/51-63mm	D (three points)	.00020"	2.5" DIA (included)	6"	4.488"	.020"	.689"	.571"
3127-E3*	2.5-3"/63-76mm	D (three points)	.00020"	2.5" DIA (included)	6"	4.488"	.020"	.689"	.571"
3127-E35*	3-3.5"/76-89mm	D (three points)	.00020"	3.5" DIA (included)	6"	4.488"	.020"	.689"	.571"
3127-E4*	3.5-4"/89-101mm	D (three points)	.00020"	3.5" DIA (included)	6"	4.488"	.020"	.689"	.571"
3127-E5*	4-5"/101-127mm	D (three points)	.00025"	optional	6"	5.512"	.035"	1.142"	.984"
3127-E6*	5-6"/127-152mm	D (three points)	.00025"	optional	6"	5.512"	.035"	1.142"	.984"
3127-E7*	6-7"/152-178mm	D (three points)	.00030"	optional	6"	5.512"	.035"	1.142"	.984"
3127-E8*	7-8"/178-203mm	D (three points)	.00030"	optional	6"	5.512"	.035"	1.142"	.984"
3127-E9	8-9"/203-228mm	D (three points)	.00035"	optional	6"	5.512"	.035"	1.142"	.984"
3127-E10	9-10"/228-254mm	D (three points)	.00035"	optional	6"	5.512"	.035"	1.142"	.984"
3127-E11	10-11"/254-279mm	D (three points)	.00035"	optional	6"	5.512"	.035"	1.142"	.984"
3127-E12	11-12"/279-305mm	D (three points)	.00035"	optional	6"	5.512"	.035"	1.142"	.984"

micrometer stand
with clamp (optional)



setting ring



.08-4": included
4-12": optional

extension rod



included



3127-E082

Set

Part No.	Range	Micrometers included	Setting ring (included)	Extension rod (included)
3127-E0122 *	.08-.12"/2-3mm	.08-.1", .1-.12"	.1" DIA	—
3127-E0282 *	.12-.28"/3-7mm	.12-.16", .16-.2", .2-.24", .24-.28"	.16" DIA, .24" DIA	—
3127-E053 *	.275-.5"/7-13mm	.275-.35", .35-.425", .425-.5"	.275" DIA, .35" DIA, .5" DIA	4"
3127-E082 *	.5-.8"/13-20mm	.5-.65", .65-.8"	.65" DIA	6"
3127-E24 *	.8-2"/20-51mm	.8-1", 1-1.2", 1.2-1.6", 1.6-2"	1" DIA, 1.6" DIA	6"
3127-E44 *	2-4"/51-101mm	2-2.5", 2.5-3", 3-3.5", 3.5-4"	2.5" DIA, 3.5" DIA	6"

* Supplied with manufacturer inspection certificate