


SNAP-OPEN DIGITAL THREE POINTS BORE GAUGES




IP54
WATERPROOF


BUILT-IN
BLUETOOTH



type A
.275-.5", steel
measuring points




type B
.5-2", carbide
measuring points



type C
2-12", carbide
measuring points




3129-E25

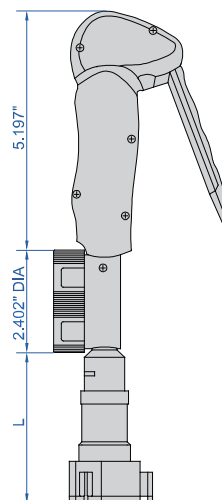

- Resolution: .00005"/0.001mm
- Display can be rotated by 270°
- Button function: on/off, zero setting, data preset, tolerance, data hold, inch/mm, measuring direction change, blue tooth, max./min./TIR, absolute/incremental measurement, data output
- Android and iPhone APP, USB type-C cable are included
- Easy and quick measurement
- Power: rechargeable Li-battery, for 30 hours continuous working (bluetooth transmission reduce working hours)
- Optional accessory: setting rings (part no. 6313)



setting ring
.275-4": included
4-12": **optional**



extension rod
included

Part No.	Range	Type	Accuracy	Setting ring	Extension rod (included)	L	a	b	c
3129-E035 *	.275-.35"	A	.00015"	.275" DIA (included)	4"	1.614"	.059"	.098"	—
3129-E0425 *	.35-.425"	A	.00015"	.35" DIA (included)	4"	1.614"	.059"	.098"	—
3129-E05 *	.425-.5"	A	.00015"	.5" DIA (included)	4"	1.614"	.059"	.098"	—
3129-E065 *	.5-.65"	B	.00015"	.65" DIA (included)	6"	2.756"	.020"	.236"	.177"
3129-E08 *	.65-.8"	B	.00015"	.65" DIA (included)	6"	2.756"	.020"	.236"	.177"
3129-E1 *	.8-1"	B	.00015"	1" DIA (included)	6"	3.031"	.020"	.315"	.236"
3129-E112 *	1-1.2"	B	.00015"	1" DIA (included)	6"	3.031"	.020"	.315"	.236"
3129-E16 *	1.2-1.6"	B	.00015"	1.6" DIA (included)	6"	3.228"	.020"	.551"	.472"
3129-E2 *	1.6-2"	B	.00020"	1.6" DIA (included)	6"	3.228"	.020"	.551"	.472"
3129-E25 *	2-2.5"	C	.00020"	2.5" DIA (included)	6"	3.937"	.020"	.689"	.571"
3129-E3 *	2.5-3"	C	.00020"	2.5" DIA (included)	6"	3.937"	.020"	.689"	.571"
3129-E35 *	3-3.5"	C	.00020"	3.5" DIA (included)	6"	3.937"	.020"	.689"	.571"
3129-E4 *	3.5-4"	C	.00020"	3.5" DIA (included)	6"	3.937"	.020"	.689"	.571"
3129-E5 *	4-5"	C	.00025"	optional	6"	5.669"	.035"	1.142"	.984"
3129-E6 *	5-6"	C	.00025"	optional	6"	5.669"	.035"	1.142"	.984"
3129-E7 *	6-7"	C	.00030"	optional	6"	5.669"	.035"	1.142"	.984"
3129-E8 *	7-8"	C	.00030"	optional	6"	5.669"	.035"	1.142"	.984"
3129-E9	8-9"	C	.00035"	optional	6"	5.669"	.035"	1.142"	.984"
3129-E10	9-10"	C	.00035"	optional	6"	5.669"	.035"	1.142"	.984"
3129-E11	10-11"	C	.00035"	optional	6"	5.669"	.035"	1.142"	.984"
3129-E12	11-12"	C	.00035"	optional	6"	5.669"	.035"	1.142"	.984"

* Supplied with manufacturer inspection certificate