
## TWO POINTS/THREE POINTS INTERNAL MICROMETERS



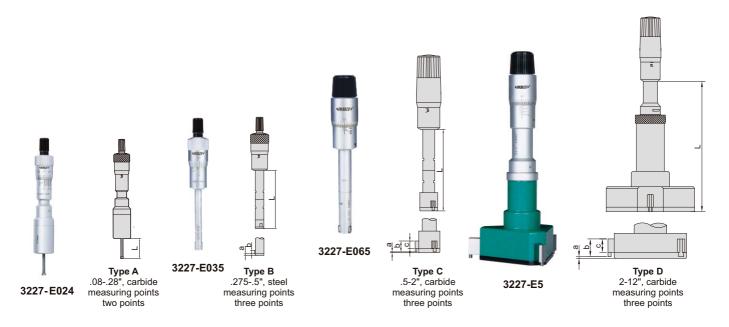

- .08-.5": graduation .0001".5-12": graduation .0002"Ratchet stop
- Optional accessory: setting rings (part no. 6312), micrometer stand and clamp (part no. 6301 and 6301-2)

#### Individual

Individual Part No.	Range	Туре	Accuracy	Setting ring	Extension rod	L	а	b	С
	, in the second	Турс	Accuracy	Octaing ring	(included)				
3227-E01*	.081"	A (two points)	.00025"	.1" DIA (included)	_	0.472"	_	_	_
3227-E012*	.112"	A (two points)	.00025"	.1" DIA (included)	_	0.472"	_	_	_
3227-E016*	.1216"	A (two points)	.00025"	.16" DIA (included)	_	0.866"	_	_	_
3227-E02*	.162"	A (two points)	.00025"	.16" DIA (included)	_	0.866"	_	_	_
3227-E024*	.224"	A (two points)	.00025"	.24" DIA (included)	_	0.866"	_	_	_
3227-E028*	.2428	A (two points)	.00025"	.24" DIA (included)	_	0.866"	_	_	_
3227-E035*	.27535"	B (three points)	.00015"	.275" DIA (included)	4"	2.146"	.059"	.098"	_
3227-E0425*	.35425"	B (three points)	.00015"	.35" DIA (included)	4"	2.146"	.059"	.098"	_
3227-E05*	.4255"	B (three points)	.00015"	.5" DIA (included)	4"	2.146"	.059"	.098"	_
3227-E065*	.565"	C (three points)	.00015"	.65" DIA (included)	6"	3.150"	.020"	.236"	.177"
3227-E08*	.658"	C (three points)	.00015"	.65" DIA (included)	6"	3.150"	.020"	.236"	.177"
3227-E1*	.8-1"	C (three points)	.00015"	1" DIA (included)	6"	3.543"	.020"	.315"	.236"
3227-E112*	1-1.2"	C (three points)	.00015"	1" DIA (included)	6"	3.543"	.020"	.315"	.236"
3227-E16*	1.2-1.6"	C (three points)	.00015"	1.6" DIA (included)	6"	3.819"	.020"	.551"	.472"
3227-E2*	1.6-2"	C (three points)	.00020"	1.6" DIA (included)	6"	3.819"	.020"	.551"	.472"
3227-E25*	2-2.5"	D (three points)	.00020"	2.5" DIA (included)	6"	4.488"	.020"	.689"	.571"
3227-E3*	2.5-3"	D (three points)	.00020"	2.5" DIA (included)	6"	4.488"	.020"	.689"	.571"
3227-E35*	3-3.5"	D (three points)	.00020"	3.5" DIA (included)	6"	4.488"	.020"	.689"	.571"
3227-E4*	3.5-4"	D (three points)	.00020"	3.5" DIA (included)	6"	4.488"	.020"	.689"	.571"
3227-E5*	4-5"	D (three points)	.00025"	optional	6"	5.512"	.035"	1.142"	.984"
3227-E6*	5-6"	D (three points)	.00025"	optional	6"	5.512"	.035"	1.142"	.984"
3227-E7*	6-7"	D (three points)	.00030"	optional	6"	5.512"	.035"	1.142"	.984"
3227-E8*	7-8"	D (three points)	.00030"	optional	6"	5.512"	.035"	1.142"	.984"
3227-E9	8-9"	D (three points)	.00035"	optional	6"	5.512"	.035"	1.142"	.984"
3227-E10	9-10"	D (three points)	.00035"	optional	6"	5.512"	.035"	1.142"	.984"
3227-E11	10-11"	D (three points)	.00035"	optional	6"	5.512"	.035"	1.142"	.984"
3227-E12	11-12"	D (three points)	.00035"	optional	6"	5.512"	.035"	1.142	.984"

# micrometer stand with clamp (optional)



setting ring



.08-4": included 4-12": **optional** 

## extension rod



included



3227-E24

### Set

Part No.	Range	Micrometers included	Setting ring (included)	Extension rod (included)
3227-E0122*	.0812"	.081", .112"	.1" DIA	_
3227-E0282*	.1228"	.1216", .162", .224",.2428	.16" DIA, .24" DIA	_
3227-E053*	.2755"	.27535", .35425", .4255"	.275" DIA, .35" DIA, .5" DIA	4"
3227-E082*	.58"	.565", .658"	.65" DIA	6"
3227-E24*	.8-2"	.8-1", 1-1.2", 1.2-1.6", 1.6-2"	1" DIA, 1.6" DIA	6"
3227-E44*	2-4"	2-2.5", 2.5-3", 3-3.5", 3.5-4"	2.5" DIA, 3.5" DIA	6"

<sup>\*</sup>Supplied with manufacturer inspection certificate