
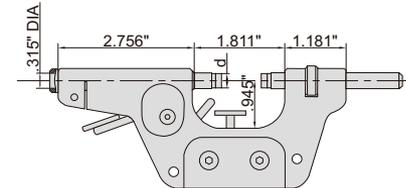


OPTIONAL SMALL MEASUREMENT FORCE(2-2.6N),
 SUITABLE FOR PLASTIC PARTS AND THIN-WALLED PIPE FITTINGS;
 ALSO OPTIONAL LARGE MEASURING FORCE(9-9.8N),
 RELIABLE MEASUREMENT, NOT SUITABLE FOR EASILY DEFORMED PRODUCTS

HIGH PRECISION DIAL SNAP GAGES



INSIZE PLUS
 MADE IN EUROPE

digital indicator
 is optional

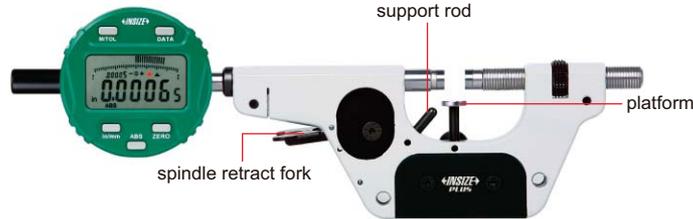

3340-406/3340-408

digital indicator
 is optional

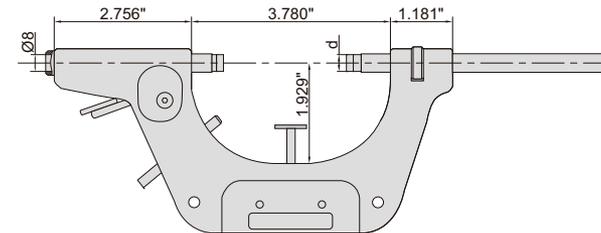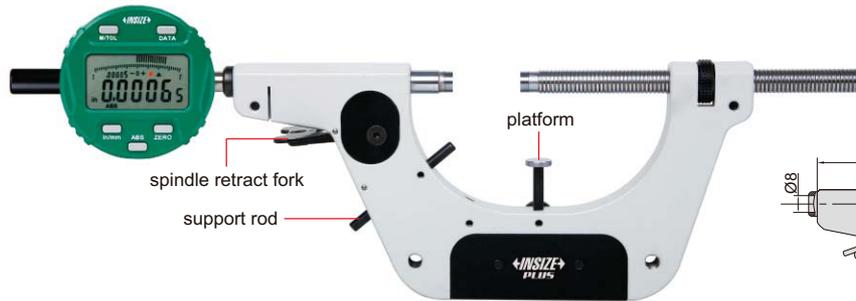

3340-908

3340-408

3340-908

- Quick measurement, constant measuring force, accuracy is not affected by the operator
- Can be zeroed at any point within spindle retract range(.47")
- Steel measuring faces
- Adjustable support rod and platform height
- Both hands can operate
- Optional accessory: 0.0001" or .00005" dial/digital indicators, base(part no. **3340-STAND**)

base(optional)



Part No.	Range	Accuracy (without dial comparator)	Repeatability (without dial comparator)	Spindle retracte range	Flatness of measuring faces	Parallelism of measuring faces	Measuring force	Measuring surface diameter d
3340-406	0-1.50"	±.0001"	.00005"	.47"	3.9µin	39µin	4.6-5.4N	.236" DIA
3340-408	0-1.65"	±.0001"	.00005"	.47"	3.9µin	39µin	4.6-5.4N	.315" DIA
3340-908	0-3.54"	±.0001"	.00005"	.47"	7.9µin	39µin	4.6-5.4N	.315" DIA