

DIGITAL MICROMETERS/SNAP GAUGES

ONE TURN OF SLEEVE MAKES .2" SPINDLE FEED,
PRESS THE FORK, THE SPINDLE RETRACTS .12"

MEASUREMENT ACCURACY IS NOT
AFFECTED BY THE USE OF SLEEVE



NON-ROTATING
SPINDLE

ABSOLUTE ENCODER, THE ORIGINAL
DATA REMAINS AFTER POWER OFF

IP65
WATERPROOF


DATA
OUTPUT

ATTENTION: RECHARGEABLE BATTERY,
FOR 24 HOURS CONTINUOUS WORKING



3350-25

- Absolute encoder, the original data remains after power off
- Adjustable resolution .00001"/0.0002mm
.00005"/0.001mm
.0005"/0.01mm
- One turn of sleeve makes .2" spindle feed
- Measurement accuracy is not affected by the use of sleeve
- Press the fork, the spindle retracts .12"
- Linear ball bearings for ten million times use
- Carbide measuring faces
- Measuring force 5-10N
Customizable measuring force range 2-12N
Attention: small measuring force will reduce the
dustproof and waterproof level
- Button function: data output, tolerance, data preset, data hold,
measuring direction change, max./min./TIR, power off time,
on/off, zero, inch/mm, adjust resolution
- Supplied with gauge blocks for zero setting (except 0-1"/0-25mm)
- Power: rechargeable battery, for 24 hours continuous working

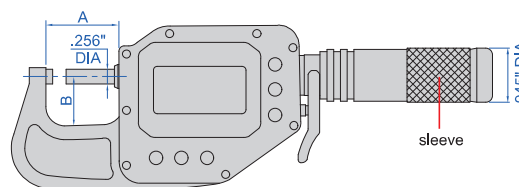

With data interface (optional wireless transmitter part no. 7315-3350, receiver is needed)

Part No.	Range	Accuracy	Repeatability	Measuring faces		A	B
				Flatness	Parallelism		
3350-25 *	0-1"/0-25mm	±.00005"	.00002"	.00002"	.00004"	1.496"	.945"
3350-50 *	1-2"/25-50mm	±.00006"	.00004"	.00002"	.00004"	2.480"	1.102"
3350-75 *	2-3"/50-75mm	±.00007"	.00004"	.00002"	.00004"	3.464"	1.772"
3350-100 *	3-3.95"/75-100mm	±.00008"	.00004"	.00002"	.00004"	4.449"	2.244"

Built-in wireless (receiver part no. 7315-2/3/6/7/8/9 is needed)

Part No.	Range	Accuracy	Repeatability	Measuring faces		A	B
				Flatness	Parallelism		
3350-25AWL *	0-1"/0-25mm	±.00005"	.00002"	.00002"	.00004"	1.496"	.945"
3350-50AWL *	1-2"/25-50mm	±.00006"	.00004"	.00002"	.00004"	2.480"	1.102"
3350-75AWL *	2-3"/50-75mm	±.00007"	.00004"	.00002"	.00004"	3.464"	1.772"
3350-100AWL *	3-3.95"/75-100mm	±.00008"	.00004"	.00002"	.00004"	4.449"	2.244"

* Supplied with manufacturer inspection certificate

alarm when over tolerance

