

NON-ROTATING SPINDLE

ABSOLUTE ENCODER, THE ORIGINAL DATA REMAINS AFTER POWER OFF

IP65 WATERPROOF

DATA OUTPUT

HIGH PRECISION ELECTRONIC BLADE MICROMETERS/SNAP GAGES

ONE TURN OF SLEEVE MAKES .2" SPINDLE FEED, PRESS THE FORK, THE SPINDLE RETRACTS .12"

MEASUREMENT ACCURACY IS NOT AFFECTED BY THE USE OF SLEEVE







ATTENTION: RECHARGEABLE BATTERY, FOR 24 HOURS CONTINUOUS WORKING

- Measure the groove diameter of shafts and keyways
- Absolute encoder, the original data remains after power off
- Adjustable resolution: .00001"/0.0002mm
.00005"/0.001mm
.0005"/0.01mm
- One turn of sleeve makes .2" spindle feed
- Measurement accuracy is not affected by the use of sleeve
- Press the fork, the spindle retracts .12"
- Linear ball bearings for ten million times use
- Carbide spindle and anvil
- Measuring force 7-10N.
Customizable measuring force range 2-12N.
Attention: small measuring force will reduce the dustproof and waterproof level
- Button function: data output, tolerance, data preset, data hold, measuring direction change, max./min./TIR, power off time, on/off, zero, mm/inch, adjust resolution
- Supplied with gage blocks for zero setting (except 0-1"/0-25mm)
- Power: rechargeable battery, for 24 hours continuous working



3352-25

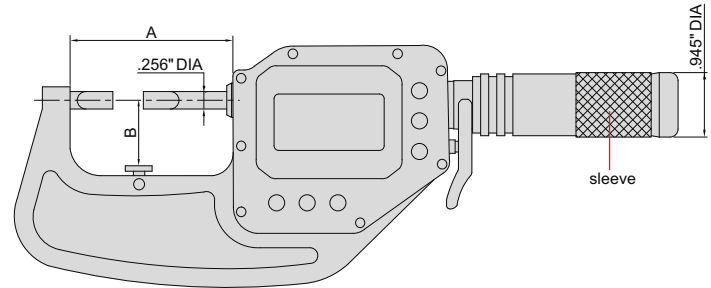

With data interface

Optional accessory:
wireless transmitter, part no. **7315-60**, wireless receiver, part no. **7315-2, 7315-3**
data output cable (keyboard format), part no. **7302-60**
data output cable (serial port format), part no. **7305-G60**
(cable length 10ft, optional cable length maximum 50ft; RS232 protocol, optional RS485 protocol)


Part No.	Range	Type	Accuracy	Repeatability	A	B
3352-25A*	0-1"/0-25mm	A	±.00008"	.00004"	2.480"	.984"
3352-50A*	1-2"/25-50mm	A	±.00008"	.00004"	3.464"	1.654"
3352-75A*	2-3"/50-75mm	A	±.00008"	.00004"	4.449"	2.205"
3352-25B*	0-1"/0-25mm	B	±.00008"	.00004"	2.480"	.984"
3352-50B*	1-2"/25-50mm	B	±.00008"	.00004"	3.464"	1.654"
3352-75B*	2-3"/50-75mm	B	±.00008"	.00004"	4.449"	2.205"

Built-in wireless

Optional accessory:
wireless receiver (keyboard format), part no. **2134-R1**
wireless receiver (serial port format), part no. **2134-R2**

Part No.	Range	Type	Accuracy	Repeatability	A	B
3352-25AWL*	0-1"/0-25mm	A	±.00008"	.00004"	2.480"	.984"
3352-50AWL*	1-2"/25-50mm	A	±.00008"	.00004"	3.464"	1.654"
3352-75AWL*	2-3"/50-75mm	A	±.00008"	.00004"	4.449"	2.205"
3352-25BWL*	0-1"/0-25mm	B	±.00008"	.00004"	2.480"	.984"
3352-50BWL*	1-2"/25-50mm	B	±.00008"	.00004"	3.464"	1.654"
3352-75BWL*	2-3"/50-75mm	B	±.00008"	.00004"	4.449"	2.205"

warning when over tolerance



wireless receiver 2134-R1, 2134-R2 (optional)



* Supplied with manufacturer inspection certificate