

HIGH PRECISION DIGITAL MICROMETERS/SNAP GAUGES

ONE TURN OF SLEEVE MAKES .4" SPINDLE FEED,
PRESS THE FORK, THE SPINDLE RETRACTS .12"

MEASUREMENT ACCURACY IS NOT
AFFECTED BY THE USE OF SLEEVE

NON-ROTATING
SPINDLE

ABSOLUTE ENCODER, THE ORIGINAL
DATA REMAINS AFTER POWER OFF


IP65
WATERPROOF

DATA
OUTPUT


ATTENTION: RECHARGEABLE BATTERY,
FOR 24 HOURS CONTINUOUS WORKING



alarm when over tolerance



3359-25

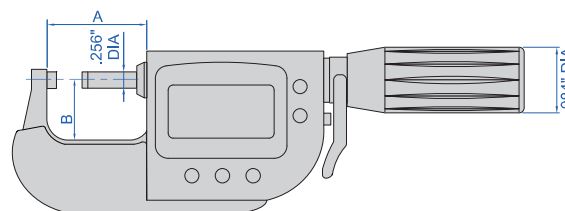

- Absolute encoder, the original data remains after power off
- Resolution .00001"/0.0001mm
- One turn of sleeve makes .4" spindle feed
- Measurement accuracy is not affected by the use of sleeve
- Press the fork, the spindle retracts .12"
- Carbide measuring faces
- Measuring force 5-10N
- Button function: data output, tolerance, data preset, data hold, measuring direction change, max./min./TIR, power off time, on/off, zero, mm/inch
- Power: rechargeable battery, for 24 hours continuous working

With data interface (optional wireless transmitter part no. 7315-3350, receiver is needed)

Part No.	Range	Accuracy	Repeatability	Measuring faces		A	B
				Flatness	Parallelism		
3359-25 *	0-1"/0-25mm	±.00002"	.00002"	.00002"	.00003"	1.496"	.945"

Built-in wireless (receiver part no. 7315-2/3/6/7/8/9 is needed)

Part No.	Range	Accuracy	Repeatability	Measuring faces		A	B
				Flatness	Parallelism		
3359-25AWL *	0-1"/0-25mm	±.00002"	.00002"	.00002"	.00003"	1.496"	.945"

* Supplied with manufacturer inspection certificate