



DIGITAL OUTSIDE MICROMETERS WITH INTERCHANGEABLE ANVILS

IP65
WATERPROOF


DATA
OUTPUT

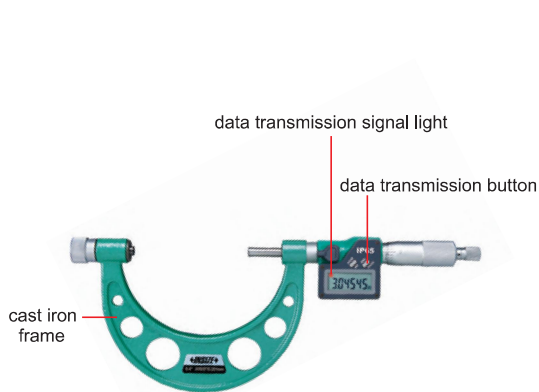




3506-100E

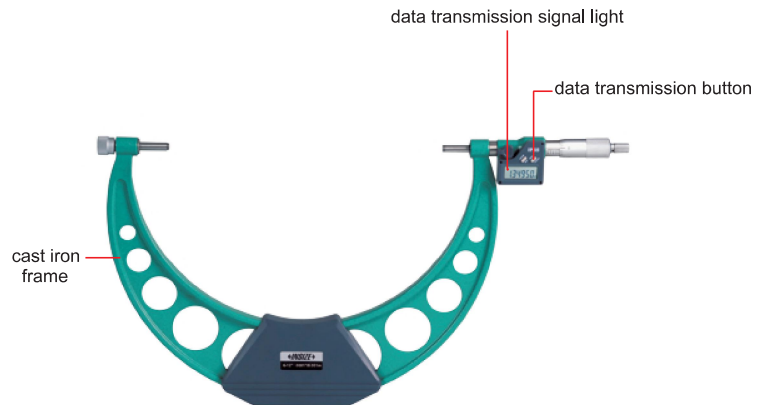

3506-300E

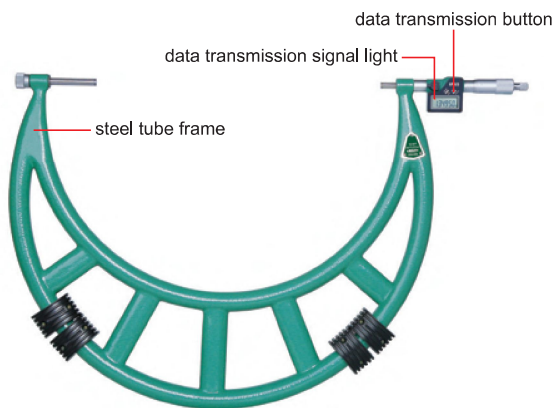


3506-400E

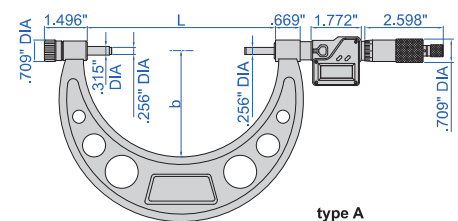


type A

- Resolution .0001"/0.001mm (resolution of **3506-100E/3506-100EWL**, **3506-150E/3506-150EWL**, **3506-100A/3506-100AWL** and **3506-150A/3506-150AWL** is .00005"/0.001mm)
- IP65 dust/waterproof
- Button function: on/off, set, inch/mm, data transmission
- Data output, automatic power off
- Ratchet stop, carbide measuring faces
- Supplied with setting standards
- Power:
 - with data interface: CR2032
 - built-in wireless: rechargeable lithium battery

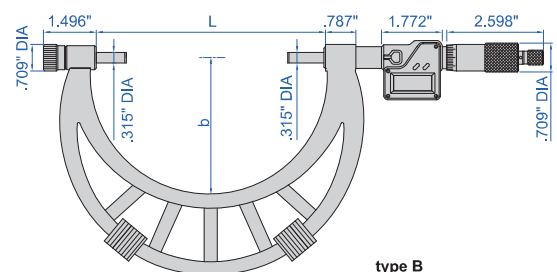

type B

support platform (optional)

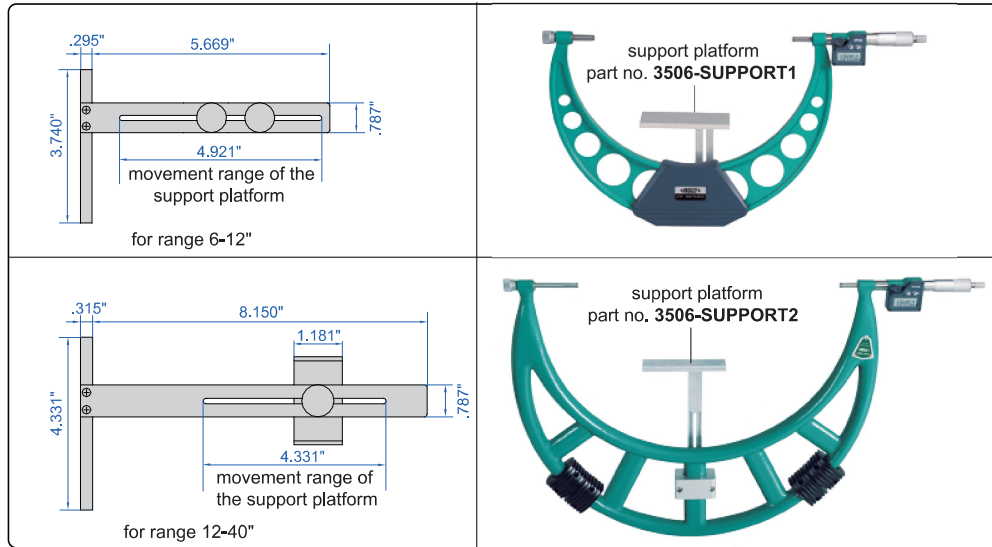

With data interface (optional wireless transmitter part no. 7315-31, receiver is needed page 6)

Part No.	Range	Type	Accuracy	L	b	Setting standard (included)	Support platform (optional)
3506-100E	0-4"/0-100mm	A	±.00020"	4.134"	2.244"	1", 2", 3"	—
3506-150E	0-6"/0-150mm	A	±.00025"	6.102"	3.228"	1", 2", 3", 4", 5"	—
3506-300E	6-12"/150-300mm	A	±.00030"	12.008"	6.496"	6", 7", 8", 9", 10"	part no. 3506-SUPPORT1
3506-301E	8-12"/200-300mm	A	±.00030"	12.008"	6.496"	8", 9", 10", 11"	
3506-400E	12-16"/300-400mm	B	±.00035"	15.945"	8.819"	13", 15"	part no. 3506-SUPPORT2
3506-500E	16-20"/400-500mm	B	±.00045"	19.882"	10.827"	17", 19"	
3506-600E	20-24"/500-600mm	B	±.00050"	23.819"	12.638"	21", 23"	
3506-700E	24-28"/600-700mm	B	±.00050"	27.756"	14.606"	25", 27"	
3506-800E	28-32"/700-800mm	B	±.00060"	31.693"	16.772"	29", 31"	
3506-900E	32-36"/800-900mm	B	±.00065"	35.630"	18.740"	33", 35"	
3506-1000E	36-40"/900-1000mm	B	±.00070"	39.567"	22.677"	37", 39"	

Built-in wireless (receiver part no. 7315-2/3/6/7/8/9 is needed)

Part No.
3506-□□□□WL

Part No. examples:

Original Part No.	Wireless Part No.
3506-100E	3506-100EWL
3506-150E	3506-150EWL