

DIGITAL INDICATING MICROMETERS (WITHOUT DATA OUTPUT)


IP54
WATERPROOF

**ABSOLUTE ENCODER, THE ORIGINAL
DATA REMAINS AFTER POWER OFF**

**ATTENTION: SETTING
STANDARDS ARE NOT INCLUDED**




3508-25E

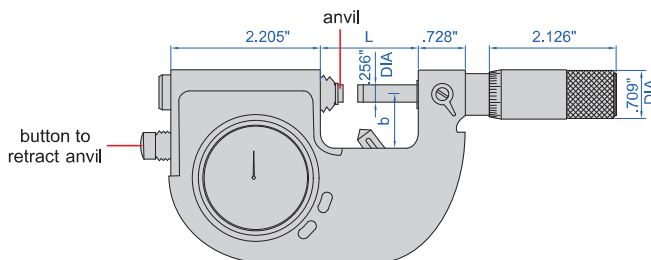

- Absolute encoder, the original data remains after power off
- Measuring stroke of anvil: >.039"
- Reading in digital and analog
- Button function: on/off, zero setting, inch/mm, tolerance, display setting
- Carbide measuring faces
- Power: rechargeable Li-battery, for 20 hours continuous working
- Optional accessory: gauge blocks grade 0 (4112-A series), for zero setting

warning in red or yellow when over tolerance

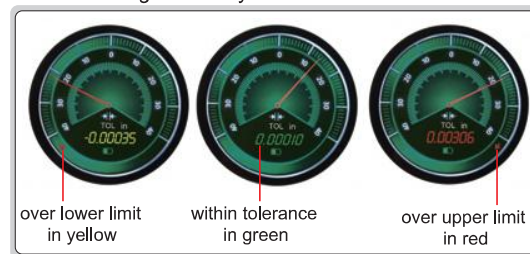

Part No.	Micrometer head			Digital indicator			Repeatability	L	b
	range	graduation	accuracy	range	resolution	accuracy			
3508-25E	0-1"	.0001"	.00015"	±.002"	.00001"	±.00004"	.00001"	1.398"	.591"
3508-50E	1-2"	.0001"	.00015"	±.002"	.00001"	±.00004"	.00001"	2.382"	.984"
3508-75E	2-3"	.0001"	.00015"	±.002"	.00001"	±.00004"	.00001"	3.386"	1.476"
3508-100E	3-4"	.0001"	.00015"	±.002"	.00001"	±.00004"	.00001"	4.370"	1.969"
3508-25BE	0-1"	.0001"	.00015"	±.002"	.00002"	±.00004"	.00001"	1.398"	.591"
3508-50BE	1-2"	.0001"	.00015"	±.002"	.00002"	±.00004"	.00001"	2.382"	.984"
3508-75BE	2-3"	.0001"	.00015"	±.002"	.00002"	±.00004"	.00001"	3.386"	1.476"
3508-100BE	3-4"	.0001"	.00015"	±.002"	.00002"	±.00004"	.00001"	4.370"	1.969"