


ELECTRIC THREAD PLUG GAUGES

CUSTOMIZED THREAD PLUG GAUGES ARE AVAILABLE

- Suitable for left-hand and right-hand threads
- Fast screw-in and screw-out
- Two speed levels: 200rpm, 650rpm
- Including 2 rechargeable batteries, 1 charger (30 minutes fast charging)

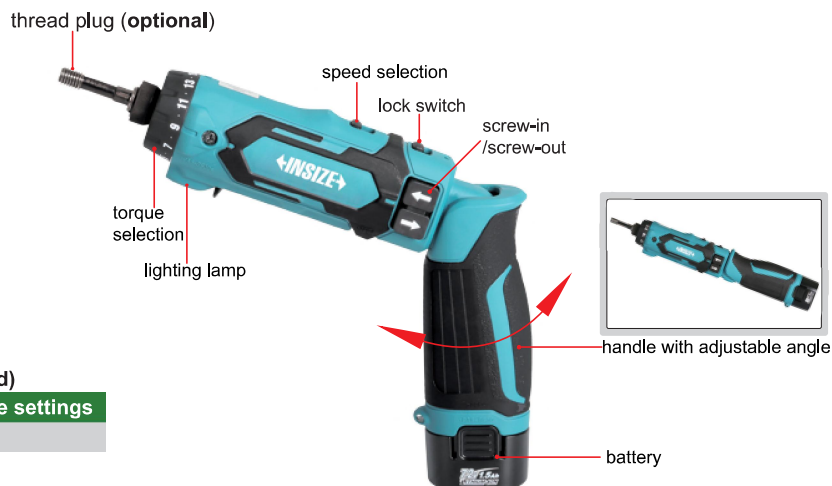


4256-HANDLE

ELECTRIC DRIVER (thread plug gauge are not included)

Part No.	Torque range	Number of torque settings
4256-HANDLE	2.66~25.67lbf.in	21

THREAD PLUG GAUGE-class 6H (DLC coated)

Part No.	Size (mm) Go
4256-3-DLC	M3×0.5
4256-3D5-DLC	M3.5×0.6
4256-4-DLC	M4×0.7
4256-5-DLC	M5×0.8
4256-6-DLC	M6×1
4256-8-DLC	M8×1.25
4256-10-DLC	M10×1.5
4256-12-DLC	M12×1.75
4256-14-DLC	M14×2
4256-16-DLC	M16×2
4256-18-DLC	M18×2.5
4256-20-DLC	M20×2.5
4256-22-DLC	M22×2.5
4256-24-DLC	M24×3
4256-27-DLC	M27×3
4256-30-DLC	M30×3.5

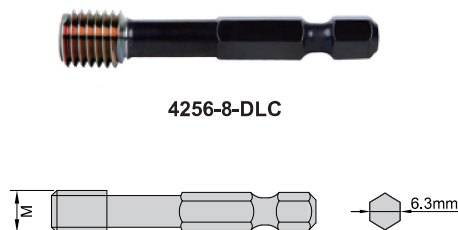

4256-8-DLC

charger and battery



- DLC coating has the following advantages:
 - High hardness, extremely wear resistance which can extend the service life of thread gauges, life time is 3-10 times of uncoated thread plug gauges.
 - Low friction coefficient
 - Corrosion resistance