


MOTORIZED BENCH CENTER



- Moveable column
- Hardened cast-iron guide surface
- Motorized measurement is suitable for mass production inspection
- Power supply: AC110V/(50/60)Hz
- Optional accessory: dial test indicators

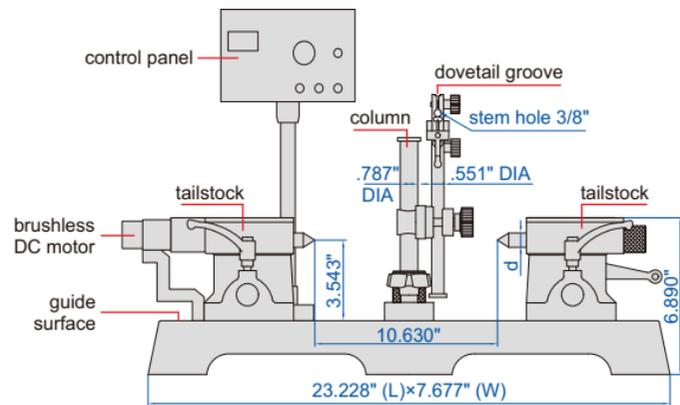

4735-270-U

Part No.	Parallelism*	Runout accuracy	Center height	Distance between two centers	Diameter of center (d)	Taper of center	Weight	Load
4735-270-U	.0004"	.00008"	3.543"	10.630"	.708"	MT2	88lb	55lb

*Parallelism of two centers to the guide surface