
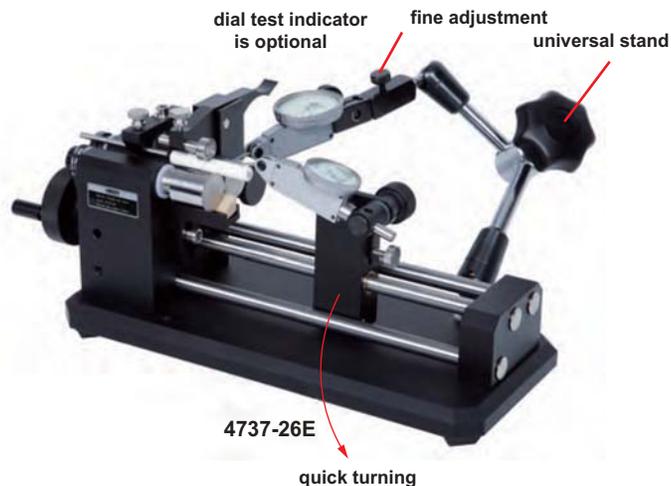



QUICK POSITIONING CONCENTRICITY GAGES

QUICK-POSITIONING, SUITABLE FOR MASS MEASUREMENT

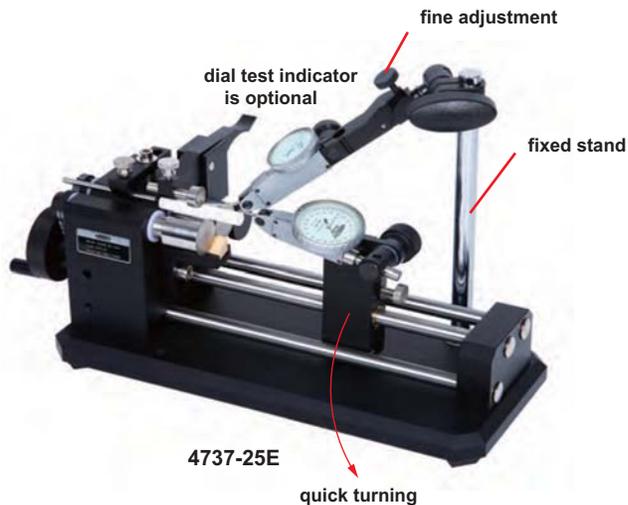


- Quick positioning, suitable for mass measurement
- Supplied with standard rod to verify accuracy
- Optional accessory: dial test indicators

to ensure the accuracy .00008", the distance between measuring point and roller should be <math><1.181\text{''}</math>

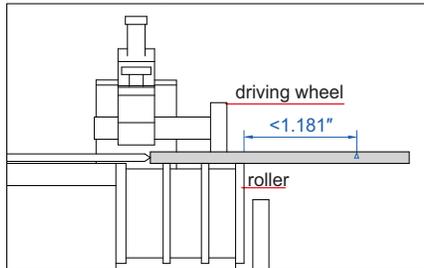

standard rod(included)

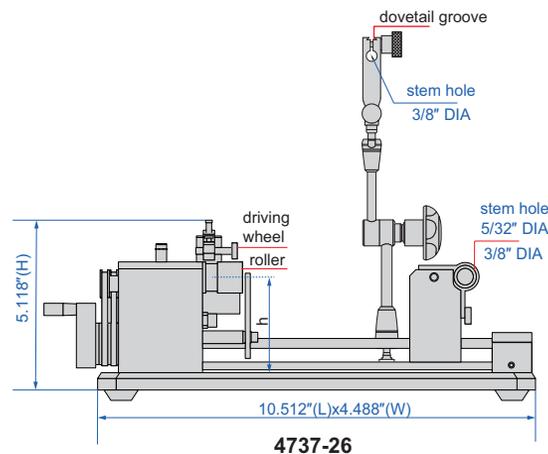

Part No.	Diameter range	Workpiece length	Accuracy	Center height (h)	L×W×H	Weight	Remark
4737-25E	.118"- .981"	.591"-3.937"	.00008"	2.756"	10.512"×4.488"×5.118"	6lb	fixed stand, high accuracy, inconvenient operation
4737-26E	.118"- .981"	.591"-3.937"	.00008"	2.756"	10.512"×4.488"×5.118"	6lb	universal stand, low accuracy, convenient operation