



COMBINED CONCENTRICITY GAUGE

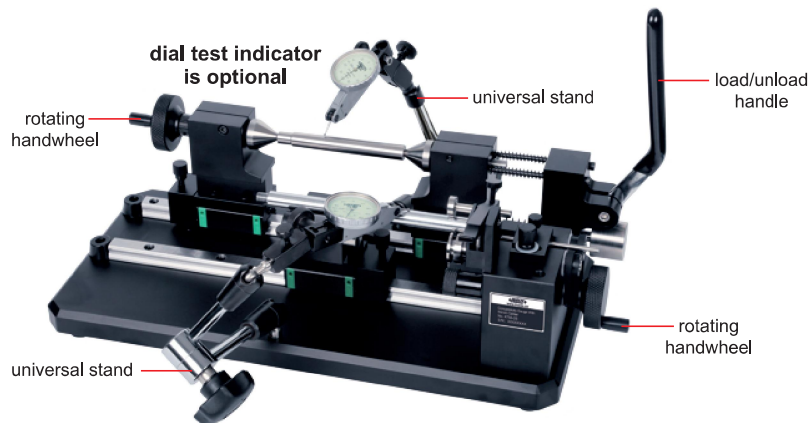

4756-25E

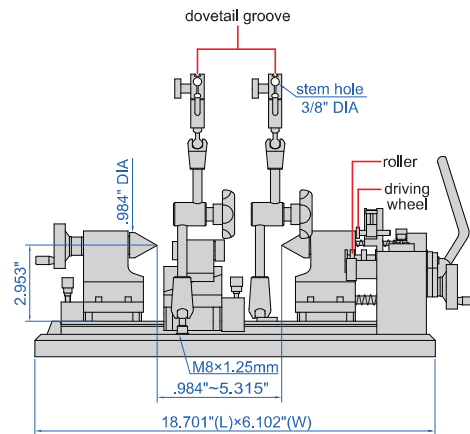

4756-25E

- Roller and center positioning modes can be quickly switched for workpieces with/without centering holes
- Roller suitable for cylinders with outside diameter .118"~.984" DIA
- Center suitable for cylinders with outside diameter .118"~4.724" DIA (centering hole diameter .039"~.984" DIA)
- Optional accessory: dial test indicator

Part No.	Runout accuracy	Workpiece length	Net weight	Load (center)	Remarks
4756-25E	.00008"	.591"~5.984"(roller) .984"~5.315"(center)	30.9lb	13.2lb	universal stand, convenient operation