

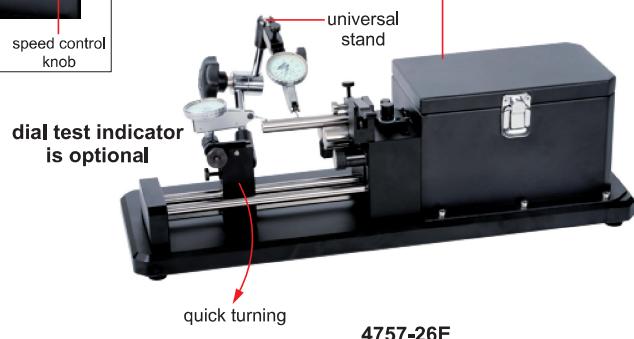

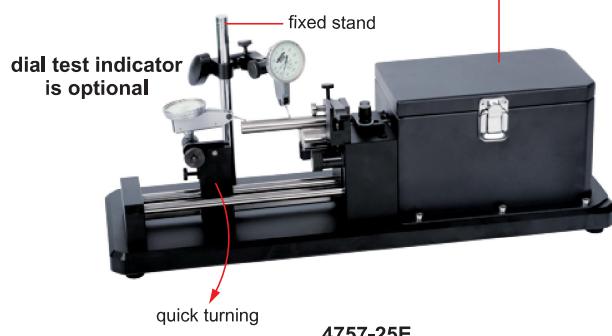


MOTORIZED CONCENTRICITY GAUGES

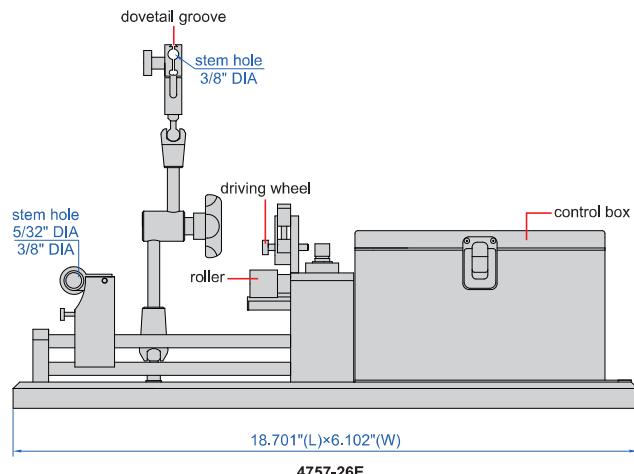

- Motorized measurement is suitable for mass production inspection
- Power supply: 100~220V, 50/60Hz
- Optional accessory: dial test indicators

to ensure the accuracy .00008",
the distance between measuring
point and roller should be <1.181"

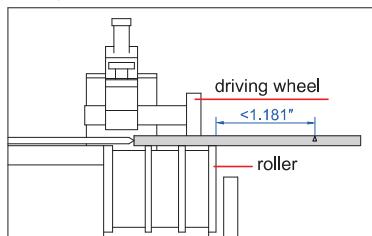

4757-26E

Part No.	Diameter range	Workpiece length	Accuracy	Net weight	Remark
4757-25E	.118-.984" DIA	.591"-5.984"	.00008"	16.8lb	fixed stand, high rigidity
4757-26E	.118-.984" DIA	.591"-5.984"	.00008"	16.8lb	universal stand, convenient operation