


PRESSURE GAUGE CALIBRATION PUMPS

- Portable design for laboratory and industrial field use
- Three quick-connect ports, two pressure gauge can be calibrated at the same time
- Stable pressure increase/decrease
- Media drain design, to avoid the dirty media pollution of the system
- The parts are made of stainless steel, stable and reliable quality
- Overall open structure, easy to maintain and repair

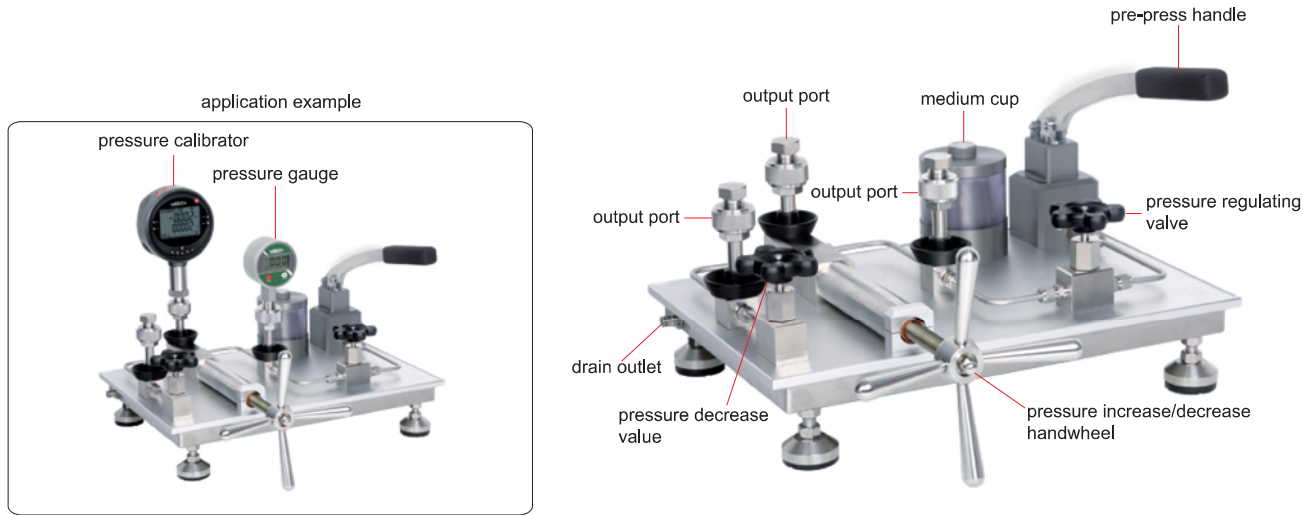

5230-HP60W-U

SPECIFICATION

Part No.	5230-HP60W	5230-HP60Y
Pressure range	(0~60)MPa(0~600)bar/(0~9000)psi	
Adjustment resolution	0.1kPa/0.001bar	
Medium	pure water	mineral oil
Output port	M20×1.5 female (Qty 3)*	
Reservoir volume	23.19 in ³ (0.38L)	
Dimension (LxWxH)	18.31×14.57×9.45"	
Weight	33lb	

*Other output port (1/2G, 1/4G, 1/2NPT, 1/4NPT) can be customized

STANDARD DELIVERY

Main unit	1pc
O-ring	20 pcs

OPTIONAL ACCESSORY

Pressure calibrator	5240-xxx
Pressure calibration adaptor	5220-PA-xxx
Carrying case	5230-CASE



carrying case (optional)