


GLOSS METERS

DATA
OUTPUT

- According to JJG 696, ISO 2813, ASTM D2457, ASTM D523, GB/T 9754
- To measure the gloss level of material surfaces such as paint, wood, stone, plastic, paper, leather, metal, etc.
- Automatic judgement after setting high and low limits
- Automatic power off



5702-DG8

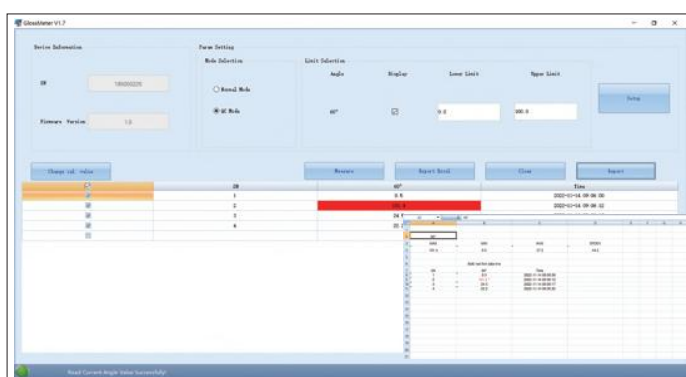

software (included), test can be controlled from the software,
display test data and report



base with calibration block
(included)

SPECIFICATION

Code	5702-DG6	5702-DG8
Measuring angle	60°	20°, 60°, 85°
Measuring range	0~200GU	20°: 0~2000GU, 60°: 0~1000GU, 85°: 0~160GU
Measuring spot	.35"×.59"	20°: .35"×.35", 60°: .35"×.59", 85°: .20"×1.50"
Minimum measurement size	.79"×.39"	2.24"×.39"
Accuracy	0~100GU: ±1.5GU 100~200GU: ±1.5%	0~100GU: ±1.5GU 100~2000GU: ±1.5%
Repeatability	0~100GU: 0.2GU 100~200GU: 0.2%	0~100GU: 0.2GU 100~2000GU: 0.2%
Resolution	0.1GU	
Zero value error	0.1GU	
Data port	USB (Type-C)	
Power supply	3.7V rechargeable Li-ion battery	
Dimension	5.31×1.77×2.95"	
Weight	.52lb	

STANDARD DELIVERY

Main unit	1pc
Base with calibration block	1pc
USB flash disk	1pc
AC/DC adapter	1pc
USB data cable	1pc