


PRECISION SINE VISES

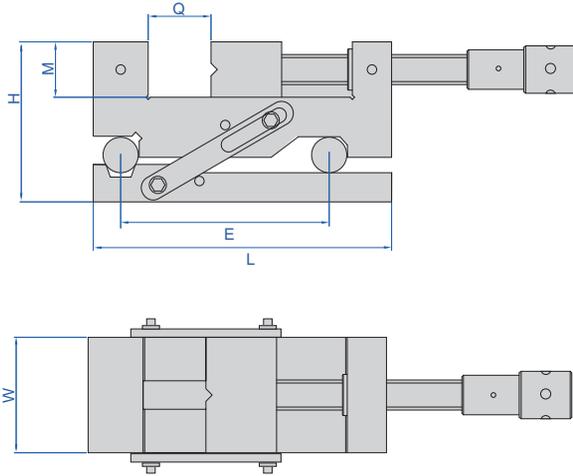

6513-85

Part No.	Jaw opening (Q)	Jaw width (W)	Roller distance(E)	L	H	M
6513-65	0-2.6"	1.969"	3.937"	5.906"	3.346"	.984"
6513-85	0-3.3"	2.480"	3.937"	7.283"	3.602"	1.260"
6513-100	0-3.9"	2.874"	5.906"	8.071"	4.134"	1.378"
6513-1001	0-3.9"	3.150"	5.906"	8.465"	4.252"	1.575"
6513-125	0-4.9"	3.465"	5.906"	9.646"	4.252"	1.575"
6513-1251	0-4.9"	3.937"	7.874"	10.039"	4.567"	1.772"
6513-160	0-6.3"	4.921"	7.874"	11.614"	4.921"	1.969"
6513-175	0-6.9"	5.906"	7.874"	12.402"	4.921"	1.969"

- Parallelism: .0002"/4"
- Squareness: .0002"/4"
- Adjustable angle: 0-55°
- Accuracy of angle: ±20 seconds
- Made of alloy steel
- Hardness HRC58-60