


QUICK MOVING PRECISION VISES

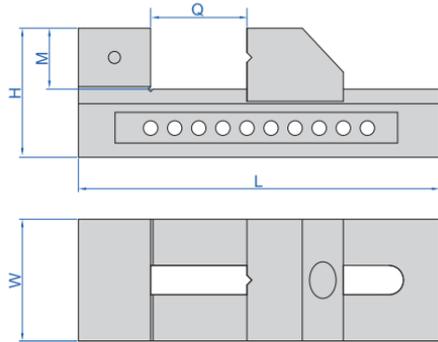

6526-85

Code	Jaw opening (Q)	Jaw width (W)	L	H	M
6526-20	0-.8"	.984"	2.559"	1.142"	.366"
6526-40	0-1.6"	1.496"	3.937"	1.890"	.906"
6526-65	0-2.6"	1.969"	5.315"	1.969"	.984"
6526-85	0-3.3"	2.480"	6.693"	2.480"	1.260"
6526-100	0-3.9"	2.874"	7.283"	2.756"	1.378"
6526-1001	0-3.9"	3.150"	7.677"	3.150"	1.575"
6526-125	0-4.9"	3.465"	9.055"	3.150"	1.575"
6526-1251	0-4.9"	3.937"	9.449"	3.543"	1.772"
6526-160	0-6.3"	4.921"	11.024"	3.937"	1.969"
6526-175	0-6.9"	5.906"	11.811"	3.937"	1.969"
6526-208	0-8.2"	7.784"	13.780"	4.331"	2.165"

- Parallelism: .0002"/4"
- Squareness: .0002"/4"
- Made of alloy steel
- Hardness HRC58-60