




7101-300A




7101-400A


type A

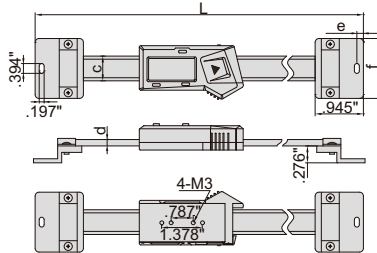


type B

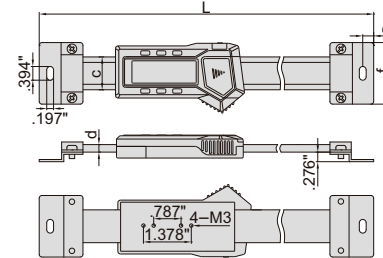

- Resolution .0005"/0.01mm
- Buttons type A: on/off, zero, inch/mm, type B: on/off, zero, inch/mm, ABS, data preset
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Supplied with bracket to be mounted on the back



example of application



Part No.	Range	Type	Accuracy	L	c	d	e	f	data output cable (optional)
7101-100A	4"/100mm	A	±.0010"	8.465"	.630"	.157"	.236"	1.417"	7315-21, 7302-21
7101-150A	6"/150mm	A	±.0015"	10.433"	.630"	.157"	.236"	1.417"	7315-21, 7302-21
7101-200A	8"/200mm	A	±.0015"	12.402"	.630"	.157"	.236"	1.417"	7315-21, 7302-21
7101-300A	12"/300mm	A	±.0015"	17.520"	.630"	.157"	.236"	1.417"	7315-21, 7302-21
7101-400A	16"/400mm	B	±.0020"	23.228"	.945"	.217"	.315"	1.772"	7315-22, 7302-22
7101-500A	20"/500mm	B	±.0020"	27.165"	.945"	.217"	.315"	1.772"	7315-22, 7302-22
7101-600A	24"/600mm	B	±.0030"	31.102"	.945"	.217"	.315"	1.772"	7315-22, 7302-22
7101-800A	32"/800mm	B	±.0040"	38.976"	.945"	.217"	.315"	1.772"	7315-22, 7302-22
7101-1000A	40"/1000mm	B	±.0040"	48.819"	1.220"	.413"	.394"	2.362"	7315-22, 7302-22