

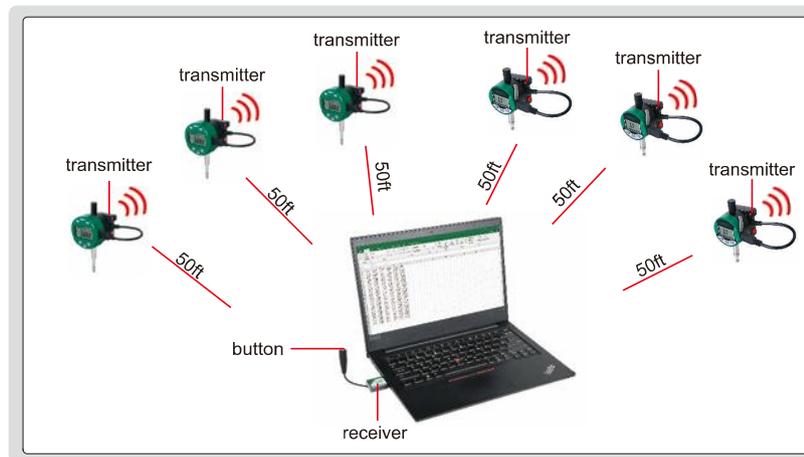
WIRELESS DATA TRANSMISSION SYSTEM OF DIGITAL INDICATORS (REMOTE CONTROL)



- The readings of digital indicators can be transmitted to computers or mobile phones
- Data acquisition can be remotely controlled through the receiver
- Conform to IEEE802 wireless standard 2.4GHz band communication frequency
- Transmission distance is 50ft (under the condition of no obstruction and no electromagnetic interference)

transmission method: the button on receiver is pressed once, the readings of all digital indicators are transmitted

	channel 1	channel 2	channel 3	channel 4	channel 5	channel 6
	A	B	C	D	E	F
1	24.35	0.4045	57.72	1.949	0.4075	0.03568
2	24.45	0.5045	57.82	2.049	0.5075	0.13568
3	26.35	0.4045	57.72	1.949	0.4075	0.00078
4	27.35	0.4045	57.72	1.7575	0.4075	0.0762
5	28.35	0.4045	57.72	1.7575	0.4075	0.0762
6	29.35	0.4045	57.72	1.7575	0.4075	0.07618
7	30.35	0.4045	57.72	1.7575	0.4075	0.55334
8	31.35	0.4045	57.72	1.7575	0.4075	0.61198
9	24.35	0.4045	57.72	1.7575	0.4075	0.6172







Transmitter

- Suitable for digital indicators
- CR2032 battery
- 80 hours of operation on a single battery in measurement mode

Part No.	Transmitter	Connecting with digital indicators	Transmit data
7213-56			<ul style="list-style-type: none"> ■ Press and hold the button to enter the measurement mode ■ Press the receiver button in measurement mode to acquire data

Receiver (keyboard signal)

- For computers and mobile phones
- Recognized as HID keyboard device, the transmitted data is recognized by computers or mobile phones as keyboard input data and press enter key, such as 12.345.
- No need to install drivers and softwares
- Data can be transmitted to excel, word, txt etc.
- Suitable for any softwares which can receive keyboard signal

Part No.	Product	Description	Remark	Transmit data
7213-6M	 USB port	multichannel receiver	connected with 6 transmitters, each channel has status indicator	<ul style="list-style-type: none"> ■ Press the button of the receiver ■ Data is transmitted once, the signal light of the receiver flashes once
7213-7M	 Type-C port			
7213-8M	 Micro USB port			
7213-9M	 Lightning port			

hand switch,
part no. **7213-SW** (included), length 80"

