


WEIGHING SCALES (OIML CERTIFICATE)



- LCD display, with backlight
- Zero-setting, subtracting tare value
- Overload alarm
- Automatic power off
- OIML certificate (No. 0200-NAWI-04601)



8002-30M

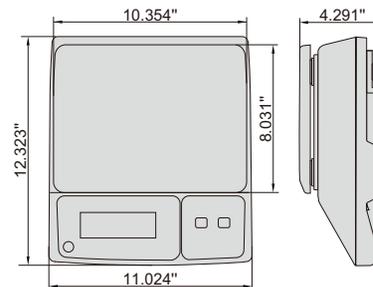

SPECIFICATION

Part No.	8002-6M	8002-15M	8002-30M
Maximum capacity	3/6kg	6/15kg	15/30kg
Minimum capacity	20g	40g	100g
Resolution (d)	1/2g	2/5g	5/10g
Verification interval (e)	2g	5g	10g
Accuracy (m is load)	m≤6.61lb: ±.0022lb 6.61lb<m≤13.23lb: ±.0044lb	m≤13.23lb: ±.0044lb 13.23lb<m≤33.07lb: ±.011lb	m≤33.07lb: ±.011lb 33.07lb<m≤66.14lb: ±.022lb
Output	no		
Operation temperature	14~104°F		
Power	rechargeable battery (6V/3.2Ah), power adapter (12V/500mA)		
Dimensions of pan	10.354×8.031"		

SPECIFICATION

Part No.	8002-6MD	8002-15MD	8002-30MD
Maximum capacity	3/6kg	6/15kg	15/30kg
Minimum capacity	20g	40g	100g
Resolution (d)	1/2g	2/5g	5/10g
Verification interval (e)	2g	5g	10g
Accuracy (m is load)	m≤6.61lb: ±.0022lb 6.61lb<m≤13.23lb: ±.0044lb	m≤13.23lb: ±.0044lb 13.23lb<m≤33.07lb: ±.011lb	m≤33.07lb: ±.011lb 33.07lb<m≤66.14lb: ±.022lb
Output	RS232		
Operation temperature	14~104°F		
Power	rechargeable battery (6V/3.2Ah), power adapter (12V/500mA)		
Dimensions of pan	10.354×8.031"		