


HANG SCALES

CAN BE
CUSTOMIZED

- Unit: kg, N
- LED display, remote control
- Zeroing, taring, weighing, totalization
- Peak (max.) and tracking mode
- Low voltage indicator
- Built-in buzzer
- Automatic power off
- Overload alarm

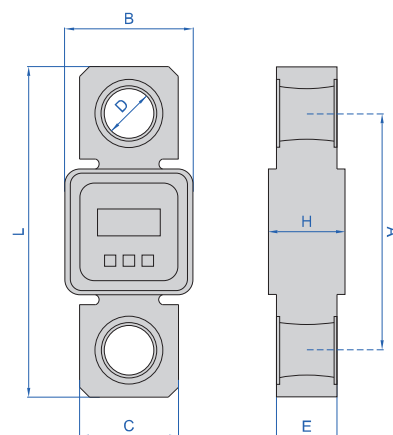

SPECIFICATION

Operation temperature	14~131°F
Operation humidity	≤85%RH
Material	alloy steel
Power supply	3×1.5V AA batteries
Stable reading time	≤8s
Limited overload	300%FS
Maximum safe load	150%FS
Overload alarm	100%FS+9e

Part No.	Dimension (in)						
	L	B	C	H	E	A	D (DIA)
8207-05T	8.03	3.9	1.81	1.97	1.18	6.22	1.02
8207-1T	8.03	3.9	1.81	1.97	1.18	6.22	1.02
8207-2T	8.03	3.9	1.81	1.97	1.18	6.22	1.02
8207-3T	8.03	3.9	1.81	2.13	1.18	6.22	1.02
8207-5T	8.74	3.9	2.36	2.28	1.38	6.38	1.22
8207-10T	10.55	4.09	3.15	2.44	1.93	7.56	1.61
8207-15T	11.97	4.33	3.62	2.6	2.28	8.35	1.83
8207-20T	13.54	4.72	4.72	2.6	2.6	9.13	2.22
8207-30T	15.51	5.2	5.2	2.87	2.87	10.39	2.6
8207-50T	19.69	5.91	5.91	3.94	3.94	13.39	3.15

Part No.	Maximum weighing		Minimum weighing		Resolution (d)		Verification interval (e)	Accuracy		Weight
	mass values	force values	mass values	force values	mass values	force values		mass values	force values	
8206-05T	0.5t	5kN	4kg	40N	0.2kg/0.1kg	2N/1N	0.2kg	±0.2kg	±1%	1.6kg
8206-1T	1t	10kN	10kg	100N	0.5kg/0.2kg	5N/2N	0.5kg	±0.5kg		2kg
8206-2T	2t	20kN	20kg	200N	1kg/0.5kg	10N/5N	1kg	±1kg		2.1kg
8206-3T	3t	30kN	20kg	200N	1kg/0.5kg	10N/5N	1kg	±1.5kg		2.3kg
8206-5T	5t	50kN	40kg	400N	2kg/1kg	20N/10N	2kg	±2kg		3.6kg
8206-10T	10t	100kN	100kg	1kN	5kg/2kg	50N/20N	5kg	±5kg		6.2kg
8206-15T	15t	150kN	100kg	1kN	5kg/2kg	50N/20N	5kg	±7.5kg		9.5kg
8206-20T	20t	200kN	200kg	2kN	10kg/5kg	100N/50N	10kg	±10kg		15kg
8206-30T	30t	300kN	200kg	2kN	10kg/5kg	100N/50N	10kg	±15kg		21.9kg
8206-50T	50t	500kN	400kg	4kN	20kg/10kg	200N/100N	20kg	±20kg		45.5kg

STANDARD DELIVERY

Main unit	1 pc
Remote controller	1 pc

OPTIONAL ACCESSORY

Hang scale pull rings	page 1368
-----------------------	-----------



hang scale pull rings (optional)