

INDUSTRIAL ELECTRONIC BALANCES

DATA
OUTPUT

- Zero-setting, weighing, counting, checking alarm
- Subtracting tare value, accumulation, percentage display
- Overload alarm
- LCD display, with backlight
- Automatic power off
- Data output
- Unit: kg, lb, g, oz, t(ola)



8307-15K




alarm light (optional)



printer (optional)

SPECIFICATION

Operation temperature	14~104°F
Operation humidity	30% ~80%RH
Dimension of pan	11.81×8.86"
Power	rechargeable lead acid battery (6V/4Ah)
Output	RS232

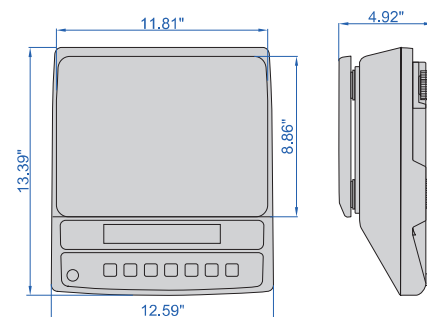

Part No.	Maximum weighing	Resolution (d)	Minimum weighing	Verification interval (e)	Number of verification interval (n)	Accuracy (m is load)
8307-15K	15kg/30lb	0.1g/.0002lb	5g/.011lb	1g/.001lb	15000	m≤11lb: ±.0011lb; m>11lb: ±.0022lb
8307-30K	30kg/60lb	0.2g/.0005lb	10g/.022lb	1g/.001lb	30000	m≤11lb: ±.0011lb; 11lb<m≤44lb: ±.0022lb; m>44lb: ±.0033lb
8307-6KA	6kg/12lb	0.1g/.0002lb	5g/.011lb	1g/.001lb	6000	m≤11lb: ±.0011lb; m>11lb: ±.0022lb
8307-15KA	15kg/30lb	0.2g/.0005lb	10g/.022lb	1g/.001lb	15000	m≤11lb: ±.0011lb; m>11lb: ±.0022lb
8307-3KB	3kg/6lb	0.1g/.0002lb	2g/.0044lb	1g/.001lb	3000	m≤1.1lb: ±.0011lb; 1.1lb<m≤4.4lb: ±.0022lb; m>4.4lb: ±.0033lb
8307-6KB	6kg/12lb	0.2g/.0005lb	10g/.022lb	1g/.001lb	6000	m≤11lb: ±.0011lb; m>11lb: ±.0022lb
8307-30KB	30kg/60lb	1g/.002lb	20g/.044lb	10g/.01lb	3000	m≤11lb: ±.011lb; 11lb<m≤44lb: ±.022lb; m>44lb: ±.033lb

OPTIONAL ACCESSORY

Alarm light	8001-ALARM
Printer	8001-PRINTER
Data output cable (keyboard format)	7302-8001 page 14
Wireless transmitter (need receiver)	7315-8001 page 6