

INDUSTRIAL ELECTRONIC BALANCES


DATA
OUTPUT

- Double weighing pan in stainless steel and plastic
- Automatic calibration, zero tracking, weighing, counting, taring
- Aluminium alloy base
- Strain balance Sensor
- Data output
- Unit: kg, lb



printer (optional)

8308-30KB

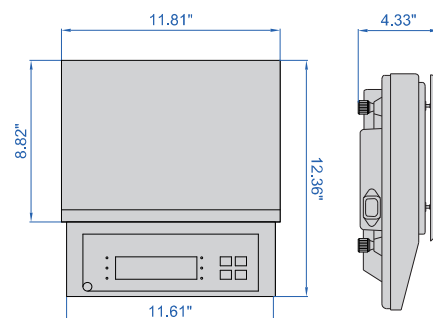

SPECIFICATION

Operation temperature	32~104°F
Operation humidity	≤80% RH
Dimension of pan	11.81×8.82"
Power	Input voltage: 110V, rechargeable lead acid battery (6V/4Ah)
Output	RS232

Part No.	Maximum weighing	Resolution (d)	Minimum weighing	Verification interval (e)	Number of verification interval (n)	Accuracy (m is load)
8308-3K-U	3kg/6.6lb	0.1g/.0001lb	2g/.0044lb	1g/.001lb	3000	$m \leq 1.1lb: \pm 0.0011lb$; $1.1lb < m \leq 4.4lb: \pm 0.0022lb$; $m > 4.4lb: \pm 0.0033lb$
8308-6K-U	6kg/13.2lb	0.1g/.0001lb	2g/.0044lb	1g/.001lb	6000	$m \leq 1.1lb: \pm 0.0011lb$; $1.1lb < m \leq 4.4lb: \pm 0.0022lb$; $m > 4.4lb: \pm 0.0033lb$
8308-10K-U	10kg/22lb	1g/.001lb	20g/.044lb	10g/.01lb	1000	$m \leq 11lb: \pm 0.011lb$; $m > 11lb: \pm 0.022lb$
8308-15K-U	15kg/33lb	0.5g/.0011lb	25g/.055lb	1g/.001lb	15000	$m \leq 11lb: \pm 0.0011lb$; $m > 11lb: \pm 0.0022lb$
8308-20K-U	20kg/44lb	1g/.001lb	20g/.044lb	10g/.01lb	2000	$m \leq 11lb: \pm 0.011lb$; $m > 11lb: \pm 0.022lb$
8308-30K-U	30kg/66lb	1g/.001lb	20g/.044lb	10g/.01lb	3000	$m \leq 11lb: \pm 0.011lb$; $11lb < m \leq 44lb: \pm 0.022lb$; $m > 44lb: \pm 0.033lb$
8308-3KA-U	3kg/6.6lb	0.5g/.0011lb	10g/.022lb	1g/.001lb	3000	$m \leq 1.1lb: \pm 0.0011lb$; $1.1lb < m \leq 4.4lb: \pm 0.0022lb$; $m > 4.4lb: \pm 0.0033lb$
8308-6KA-U	6kg/13.2lb	0.5g/.0011lb	10g/.022lb	1g/.001lb	6000	$m \leq 1.1lb: \pm 0.0011lb$; $1.1lb < m \leq 4.4lb: \pm 0.0022lb$; $m > 4.4lb: \pm 0.0033lb$
8308-15KA-U	15kg/33lb	1g/.001lb	20g/.044lb	10g/.01lb	1500	$m \leq 11lb: \pm 0.011lb$; $m > 11lb: \pm 0.022lb$
8308-30KA-U	30kg/66lb	5g/.011lb	100g/.22lb	10g/.01lb	3000	$m \leq 11lb: \pm 0.011lb$; $11lb < m \leq 44lb: \pm 0.022lb$; $m > 44lb: \pm 0.033lb$
8308-10KB-U	10kg/22lb	0.1g/.0001lb	5g/.011lb	1g/.001lb	10000	$m \leq 11lb: \pm 0.0011lb$; $m > 11lb: \pm 0.0022lb$
8308-20KB-U	20kg/44lb	0.1g/.0001lb	5g/.011lb	1g/.001lb	15000	$m \leq 11lb: \pm 0.0011lb$; $m > 11lb: \pm 0.0022lb$
8308-30KB-U	30kg/66lb	0.1g/.0001lb	5g/.011lb	1g/.001lb	30000	$m \leq 11lb: \pm 0.0011lb$; $11lb < m \leq 44lb: \pm 0.0022lb$; $m > 44lb: \pm 0.0033lb$

OPTIONAL ACCESSORY

RS232 cable	8301-CABLE*
Printer	8303-PRINTER
Data output cable (keyboard format)	7302-8501 page 14
Wireless transmitter (need receiver)	7315-8301 page 6

* Used to connect with computers