

ELECTRONIC BALANCES (BASIC TYPE)

- LCD display, with backlight
- Zero-setting, weighing, subtracting tare value
- Simple counting, checking alarm
- Overload alarm
- Automatic power off
- Unit: kg, lb, g, ct, oz, GN, tl
- Data output




limit screw



detachable
wind deflector

horizontal bubble

8317-1500

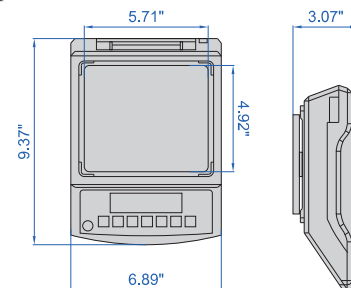

OPTIONAL ACCESSORY

Alarm light	customizable
Large display	8007-SCREEN

SPECIFICATION

Part No.	8317-300	8317-600	8317-1500
Maximum weighing	300g/1500ct	600g/3000ct	1500g/7500ct
Minimum weighing	0.2g/1ct	0.2g/1ct	0.5g/2.5ct
Resolution (d)	0.01g/.05ct	0.01g/.05ct	0.01g/.05ct
Verification interval (e)	0.1g/.5ct	0.1g/.5ct	0.1g/.5ct
Accuracy (m is load)	$m \leq 250\text{ct}: \pm 0.25\text{ct}$ $250\text{ct} < m \leq 1000\text{ct}: \pm 0.5\text{ct}$ $m > 1000\text{ct}: \pm 0.75\text{ct}$		$m \leq 2500\text{ct}: \pm 0.25\text{ct}$ $m > 2500\text{ct}: \pm 0.5\text{ct}$
Dimension of pan	5.71×4.92"		4.53" DIA
Output	RS232		
Operation temperature	32~104°F		
Operation humidity	≤85%RH		
Power	rechargeable lead acid battery (6V/1.3Ah)		



alarm light (optional)



large display (optional)