



# FLOOR SCALES

CAN BE CUSTOMIZED


DATA OUTPUT

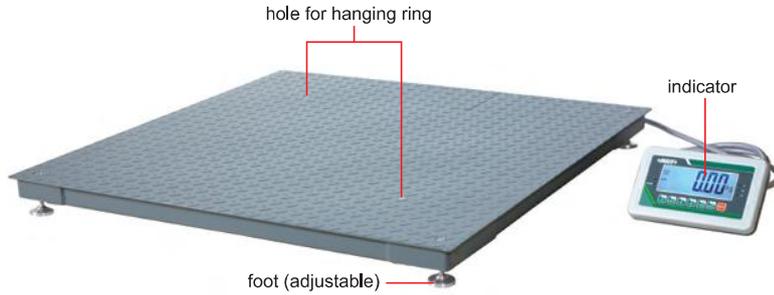


8401-1T1212

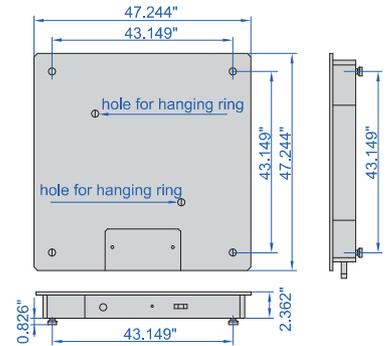

- LCD large screen display with automatic backlight
- Zero, overweight alarm, deduction, unit conversion, accumulating, animal scale, etc.
- Units: kg, g, lb, oz
- OIML approved load cell

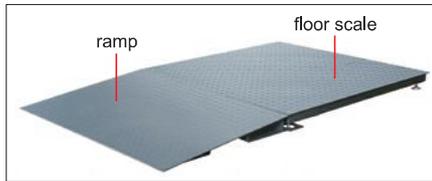

ramp (optional)

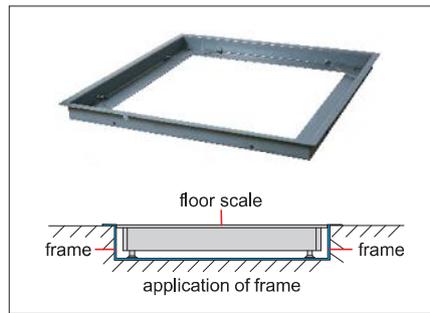

frame (optional)



stand (optional)



printer (optional)

## SPECIFICATION

Part No.	8401-1T1212	8401-2T1212	8401-3T1212
Maximum capacity	2200lb/1t	4400lb/2t	6600lb/3t
Minimum capacity	22lb/10kg	44lb/20kg	66lb/20kg
Resolution (d)	1lb	2lb	2lb
Verification interval (e)	1lb	2lb	2lb
Accuracy (m is load)	m≤551lb: ±1lb; 551lb<m≤2204lb: ±2lb	m≤1102lb: ±2lb; 1102kg<m≤4409lb: ±4lb; m>4409lb: ±4lb	
Load cell	4 pcs 350Ω		
Operation temperature	14~104°F		
Material	mild steel		
Dimension of platform	47.244×47.244"		
Power	rechargeable lead acid battery (6V/4Ah)		
Output	RS232		
Weight	309lb		



alarm light (optional)

## STANDARD DELIVERY

Main unit	1 pc
Indicator	1 pc
AC/DC adapter	1 pc
Stainless steel foot	4 pcs
Hanging ring	2 pcs

## OPTIONAL ACCESSORY

Ramp	8401-1212-1
Frame	8401-1212-2
Stand	8401-STAND
Printer	8001-PRINTER
Alarm light	8001-ALARM
Data output cable (keyboard format)	7302-8001 page 6
Wireless transmitter (receiver is needed)	7315-8001 page 14