


HIGH PRECISION PLATFORM SCALES

CAN BE
CUSTOMIZED

DATA
OUTPUT

- Zero-setting, weighing, subtracting tare value, simple counting
- LCD display, with backlight
- Data output
- Automatic power off
- Unit: kg, lb, g, oz, t(ola)

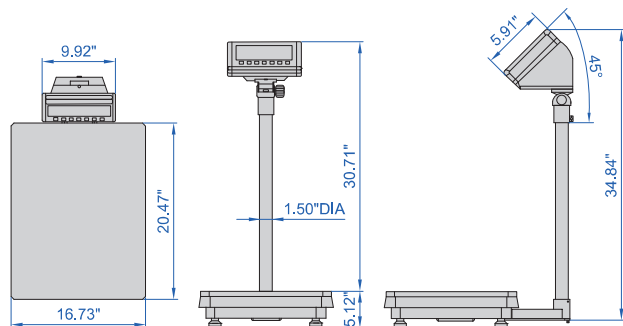

printer (optional)



8506-60-U

SPECIFICATION

Dimension of pan	20.47×16.54"
Output	RS232
Material	platform: stainless steel, base: die-cast aluminum
Operation temperature	32~104°F
Operation humidity	≤80%RH
Power supply	Input voltage: 110V, rechargeable lead acid battery (6V/4Ah)
Dimension (L×W×H)	22.83×15.75×35.43"

Part No.	Weighing capacity	Minimal load	Readability (d)	Repeatability	Linearity	Stabilization time
8506-60-U	60kg/132lb	20g/.04lb	1g/.002lb	±1g/.002lb	±2g/.004lb	3s
8506-100-U	100kg/220lb	20g/.04lb	1g/.002lb	±1g/.002lb	±2g/.004lb	
8506-200-U	200kg/440lb	200g/.4lb	10g/.02lb	±10g/.02lb	±20g/.04lb	
8506-300-U	300kg/660lb	200g/.4lb	10g/.02lb	±10g/.02lb	±20g/.04lb	
8506-600-U	600kg/1320lb	400g/1lb	20g/.04lb	±20g/.04lb	±40g/.1lb	
8506-200A-U	200kg/440lb	50g/.1lb	1g/.002lb	±2g/.004lb	±3g/.006lb	4s
8506-300A-U	300kg/660lb	50g/.1lb	1g/.002lb	±2g/.004lb	±3g/.006lb	
8506-600A-U	600kg/1320lb	200g/.4lb	10g/.02lb	±10g/.02lb	±20g/.04lb	

OPTIONAL ACCESSORY

RS232 cable	8301-CABLE*
Data output cable (keyboard format)	7302-8301
Wireless transmitter	7315-8301**
Printer	8391-PRN10

* Used to connect with computers

** Receivers are needed: part No. 7315-2/3/6/7/8/9