

ELECTRONIC PLATFORM SCALES (BASIC TYPE)

CAN BE
CUSTOMIZED

DATA
OUTPUT




- Zero-setting, simple counting
- Weighing, subtracting tare value
- Overload alarm
- Automatic power off
- Low voltage indication
- Unit: kg, lb
- Data output



printer (optional)



8508-61KA

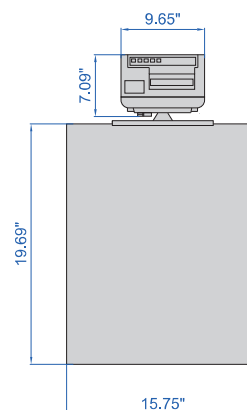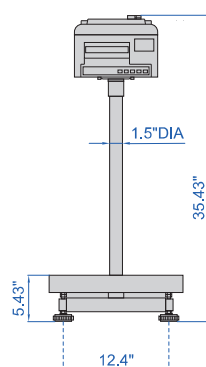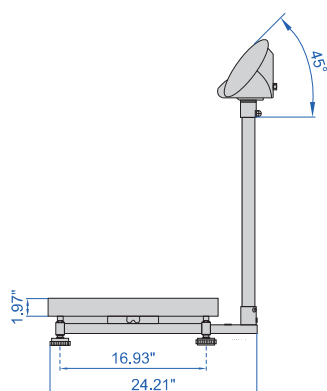

SPECIFICATION

Output	RS232
Operation temperature	14~104°F
Operation humidity	30%~80%RH
Power supply	rechargeable lead acid battery (6V/4Ah)
Stabilization time	≤2s
Material	platform: stainless steel, base: carbon steel
Dimension of platform	15.75×19.69"
Weight	30.86lb

OPTIONAL ACCESSORY

RS232 cable	8306-CABLE*
Printer	8306-PRINTER

* Used to connect with computers

Part No.	Maximum weighing	Resolution (d)	Minimum weighing	Repeatability	Accuracy	Verification interval (e)	Number of verification interval (n)
8508-61KA	61kg/134lb	1g/.001lb	20g/.044lb	±2g/.004lb	±3g/.006lb	10g/0.02lb	6100
8508-110KA	110kg/242lb	1g/.001lb	50g/.11lb	±2g/.004lb	±3g/.006lb	10g/0.02lb	11000
8508-160KA	160kg/352lb	1g/.001lb	50g/.11lb	±3g/.006lb	±5g/.011lb	10g/0.02lb	16000
8508-61K	61kg/134lb	10g/.01lb	200g/.44lb	±20g/.04lb	±30g/.06lb	100g/0.2lb	610
8508-110K	110kg/242lb	10g/.01lb	200g/.44lb	±20g/.04lb	±30g/.06lb	100g/0.2lb	1100
8508-160K	160kg/352lb	10g/.01lb	200g/.44lb	±20g/.04lb	±30g/.06lb	100g/0.2lb	1600
8508-210K	210kg/462lb	10g/.01lb	200g/.44lb	±20g/.04lb	±30g/.06lb	100g/0.2lb	2100
8508-310K	310kg/683lb	10g/.01lb	200g/.44lb	±30g/.06lb	±50g/.1lb	100g/0.2lb	3100